



**NTT**

NTT Information Sharing Platform Laboratories

## Flows as a topology chart

Hiroshi ASAKURA, Kensuke NAKATA,  
Shingo KASHIMA, Hiroshi KURAKAMI

---

NTT Information Sharing Platform Labs.

## ■ Target

- IaaS platform (cloud computing environment)
- ISP backbone

## ■ Our Goals

- Referring to our tool for provisioning / capacity planning
- Reducing the cost for troubleshooting

## ■ Traffic Monitoring System “SASUKE”

- “SASUKE” is a hero of Ninja, covert agent
  - fictitious character, a story of 16<sup>th</sup> century.
- Collects Flow information from Exporters like a covert agent and report traffic information to a manager



“SASUKE”


■ In FLOCON 2010, last year

➤ Atsushi Kobayashi


“SASUKE” Traffic Monitoring Tool: Traffic Shift Monitoring Based on Correlation between BGP Messages and Flow Data

• Features of this system:

- Visualizing traffic data using BGP routing information and Flow data.
- Showing these data as a stacked line chart

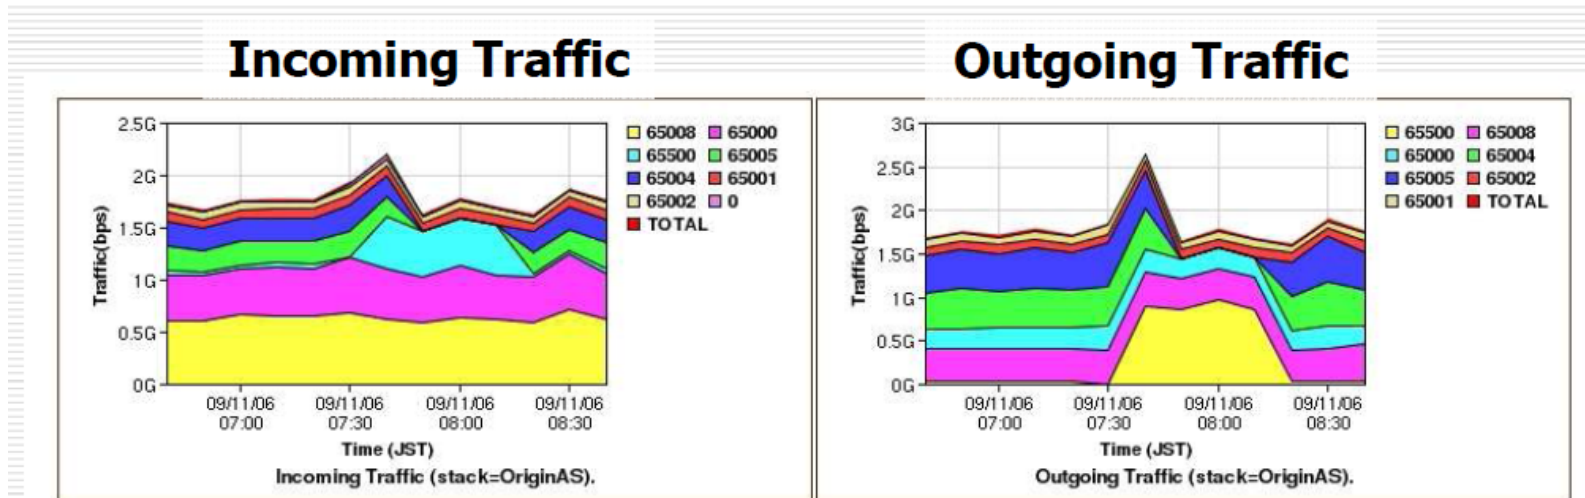



- A part of this system has been tested in commercial service, but there is an issue.
  - Only traffic change of observation point is visualized over the time by stacked line charts.
  - The chart doesn't show where flows go or come from.
  - We have to trace flows manually on inside / outside our network

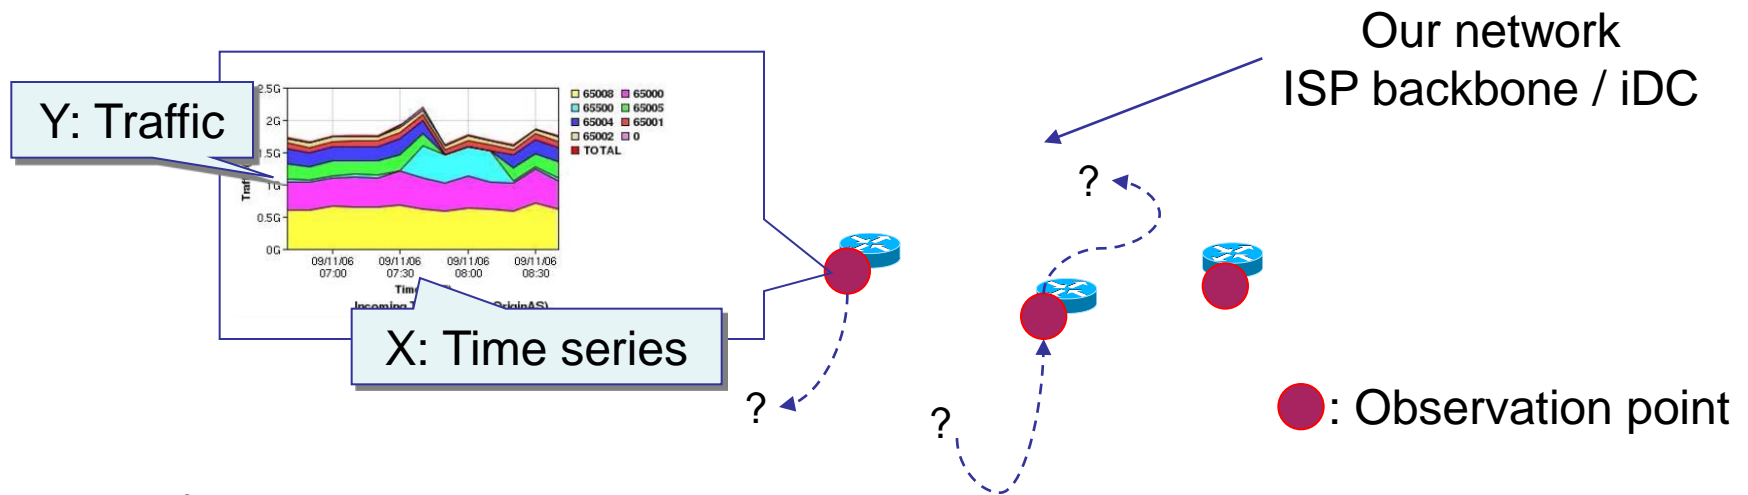


- New functions to solve above issue.
  - AS Network Topology Chart (for outside of our NW, iDC)
  - VM Network Topology Chart (for inside of our NW, iDC)

# Outside of Data Center

## ■ Two types of cloud

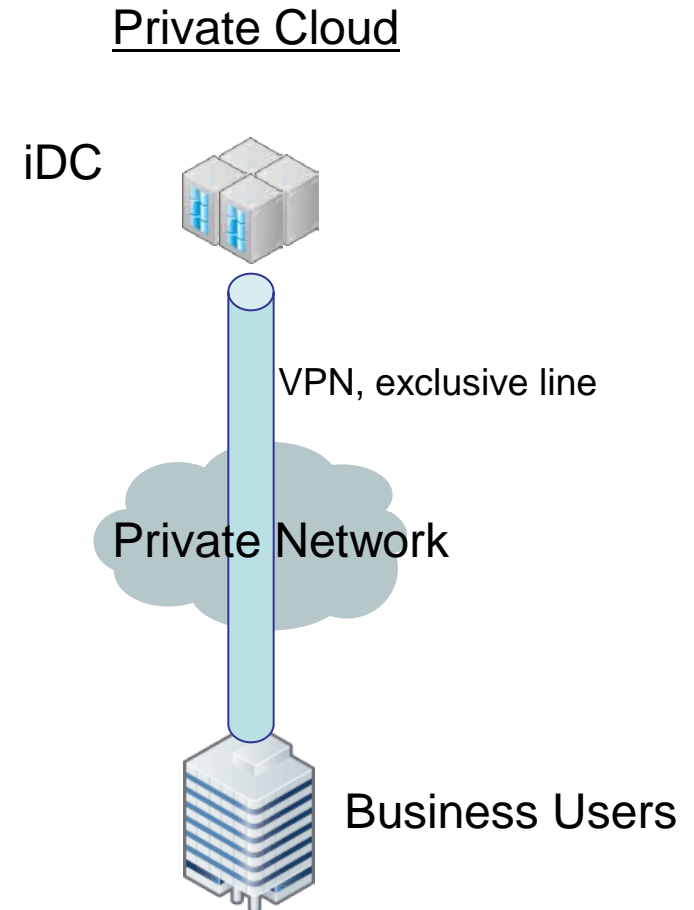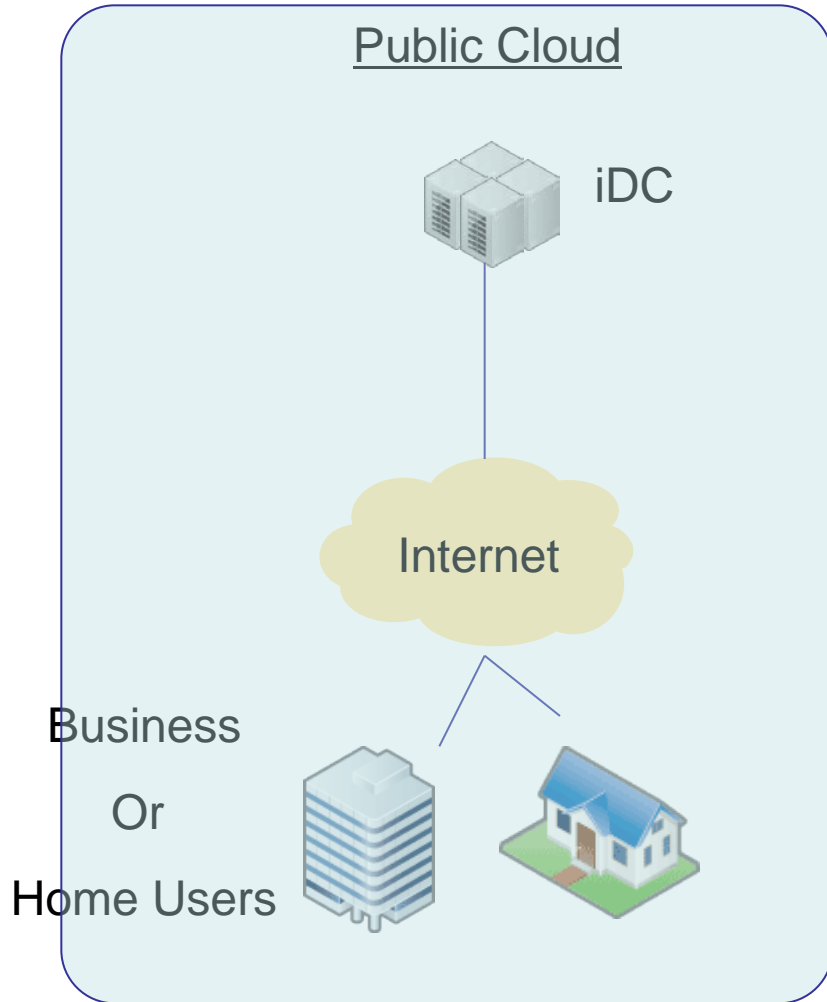


- AS's connect clients with servers of the data center.
- Complicated network.
  - The routes have been always changing.

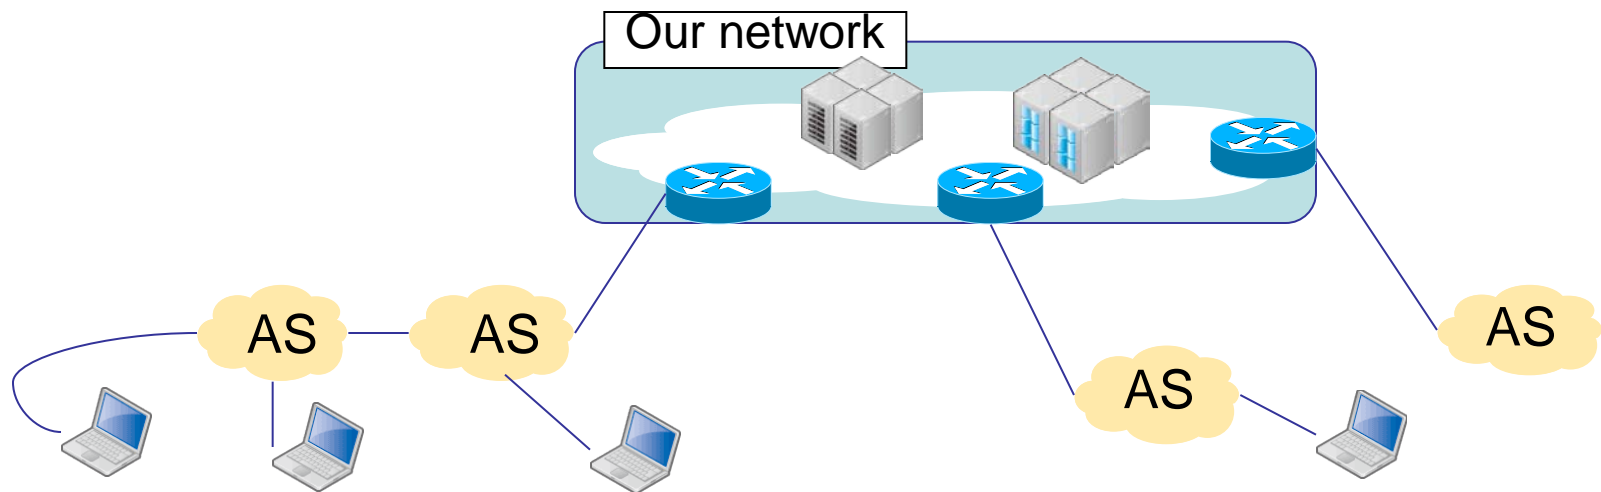

- Knowing of end-to-end flow is very important
  - To reduce the cost of trouble shooting for IaaS operators.
  - To choose a location of data center for IaaS users.


- Represents relationships between own AS and others
  - top-k traffic and BGP routing information of any 5 min.

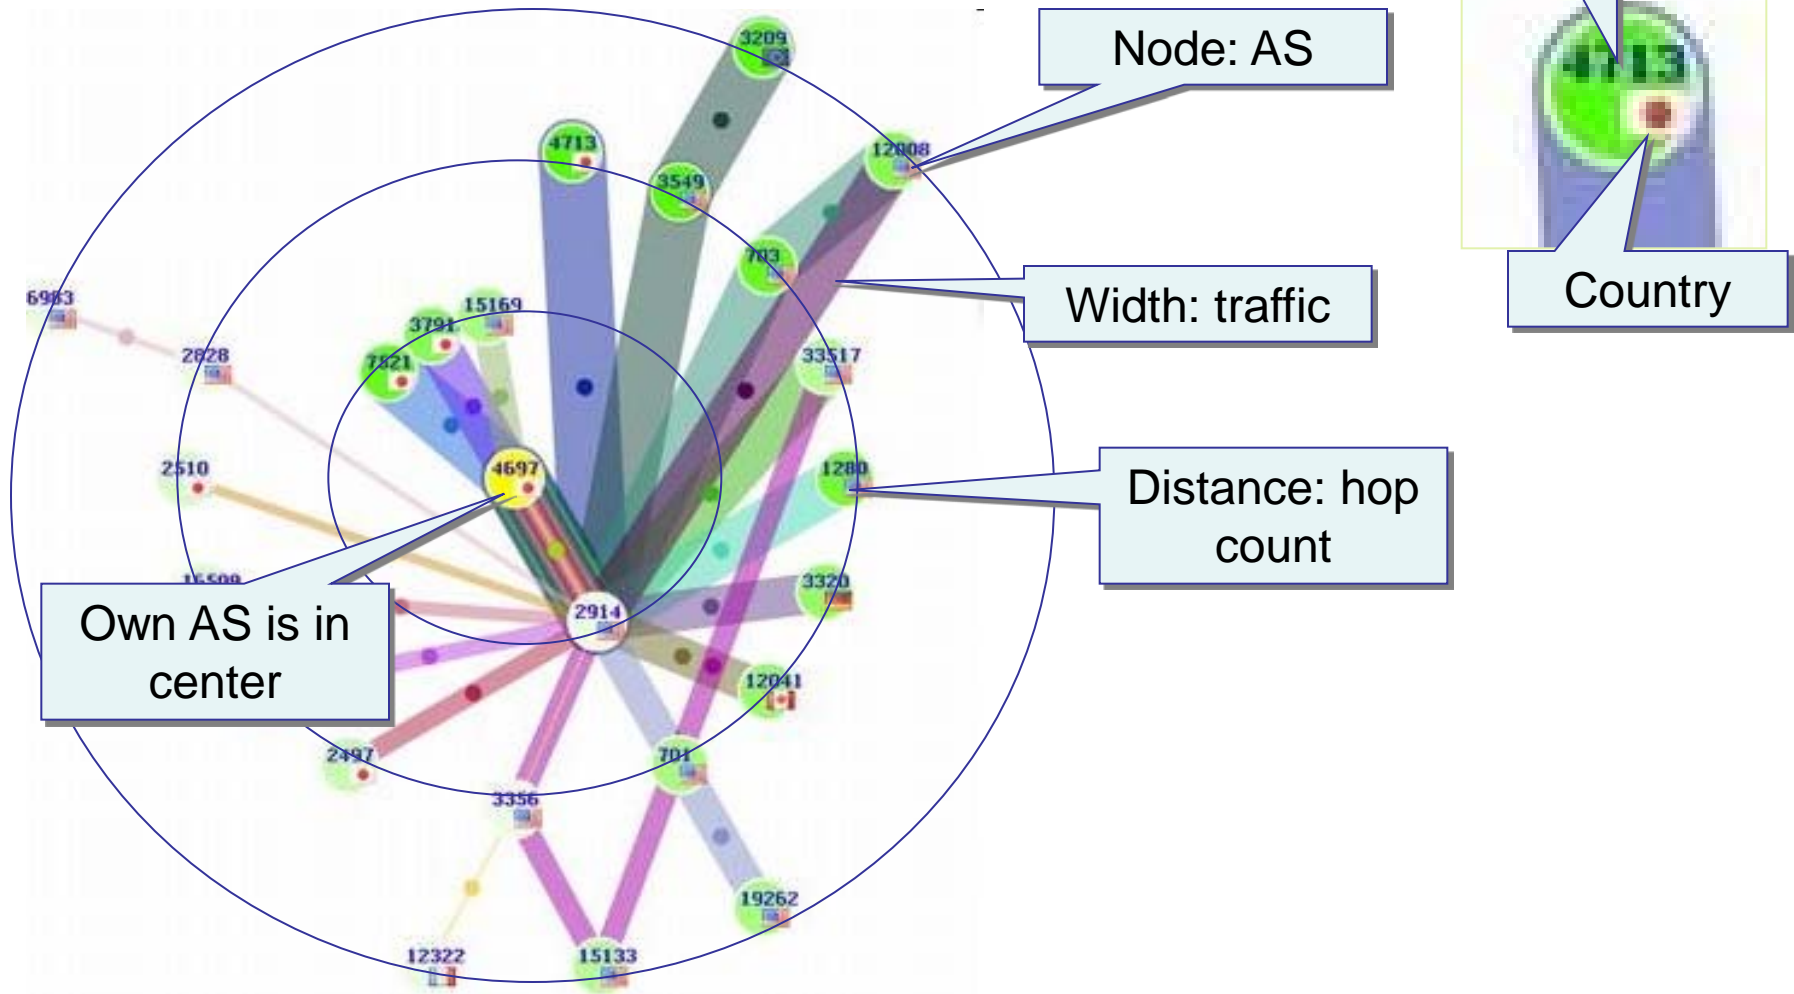




## ■ Link Down between AS's

- If a connecting link between AS's has gone down, the route may have changed and traffic which related with own AS may change extremely.
- IaaS operators have to know what happened and whether roundabout route was created or not.

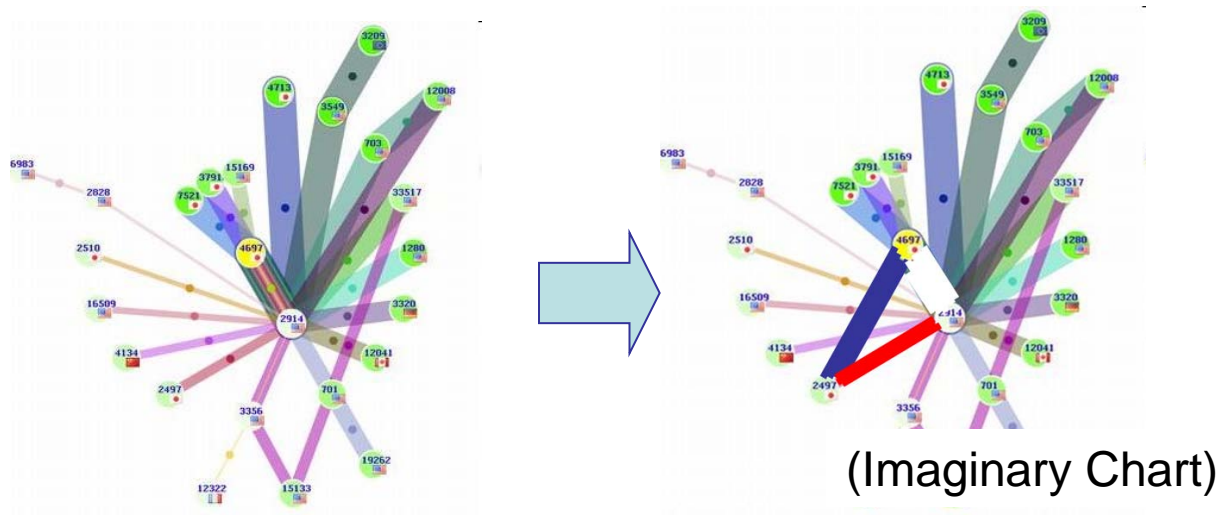


- Recently, IaaS users can choose a server location, typically, from Europe, North America or Asia Pacific.
  - In the near the future, choices may be increased.

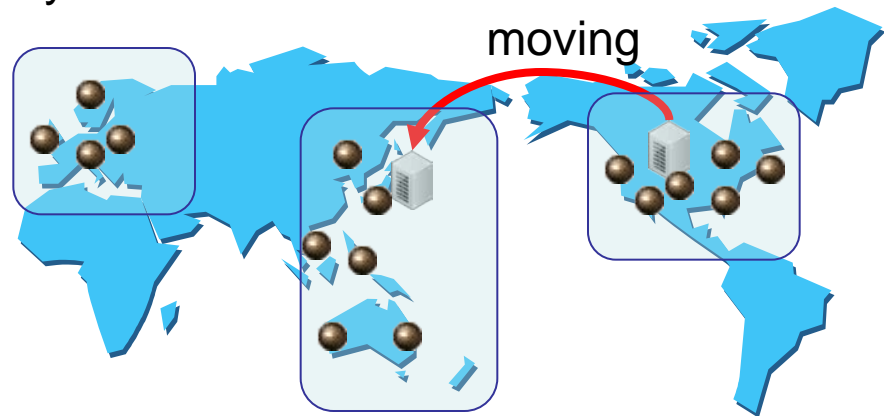

- To choose a location of iDC, IaaS users can get some information from the chart.
  - Check large traffic nodes




foreign country?




large # of hop count?

# Inside of Data Center

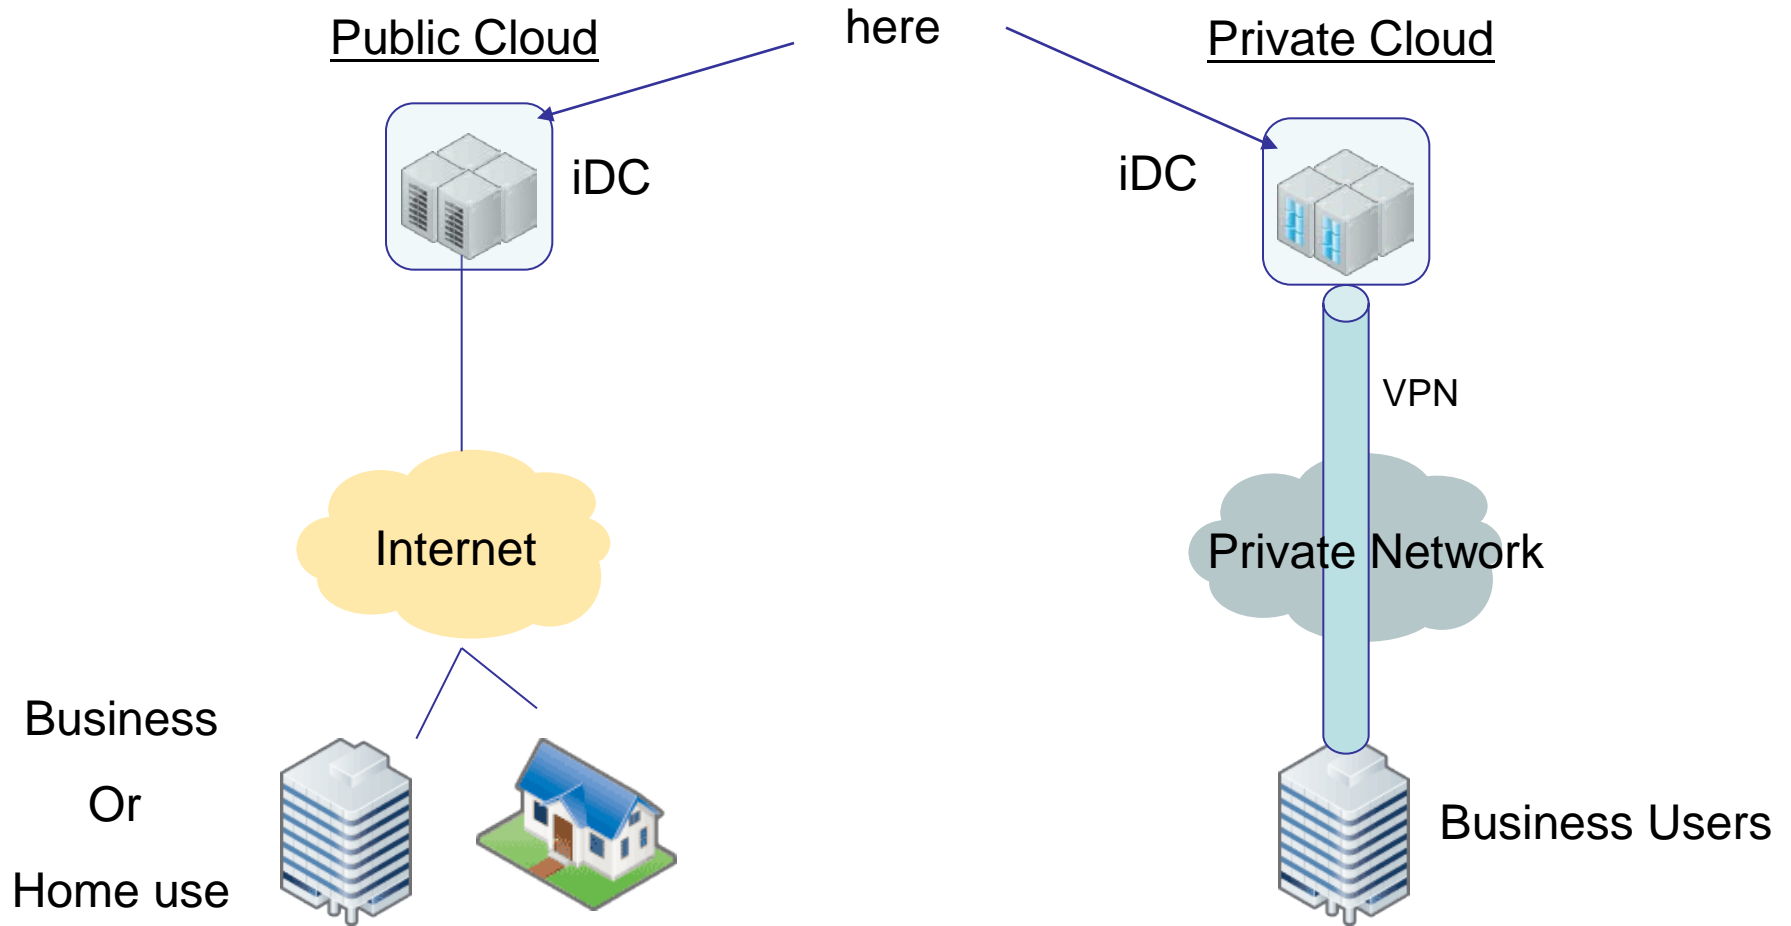

- More complicated structure than traditional one
  
- New technologies:
  - Virtualization technology
    - Physical machine includes virtual machines and switch(es)
    - Virtual LAN is also used
  
  - Live migration technology
    - Moving of a running VM to another physical machine without suspension
    - Any VMs may be moved to another physical machines, network structure may be changed.
  
- Approaches to visualization
  - Create a model of virtualized servers and network in a physical server.
  - Extend the visualizing scope to all physical servers in the data center.
  - Supporting the live migration is future work.

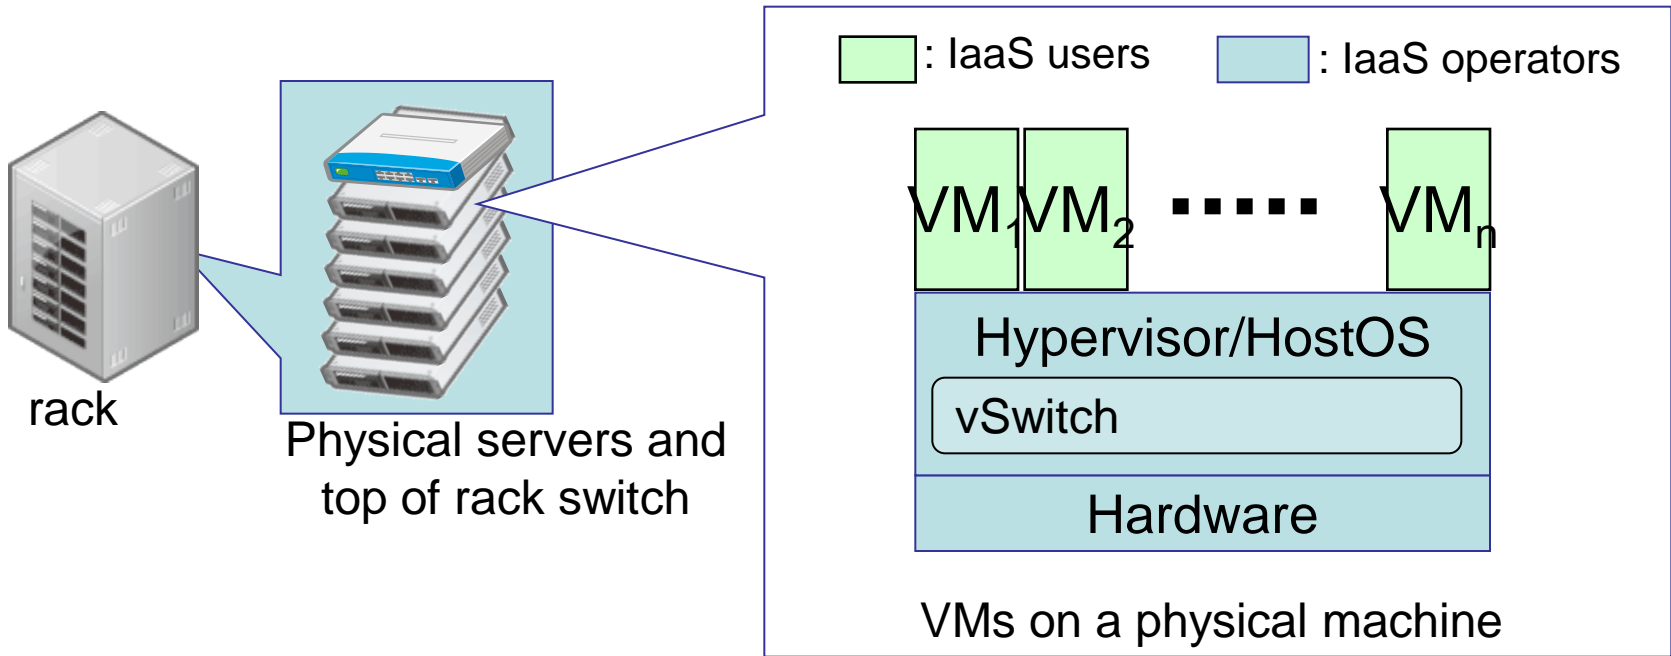


■ VM (Virtual Machine) / Guest OS

- A software implementation of machine
- Logical instance, same as physical one


■ Hypervisor / Host OS

- Monitor and manage VMs
- IaaS operator can control this component.

VMs and vSwitch on a physical machine

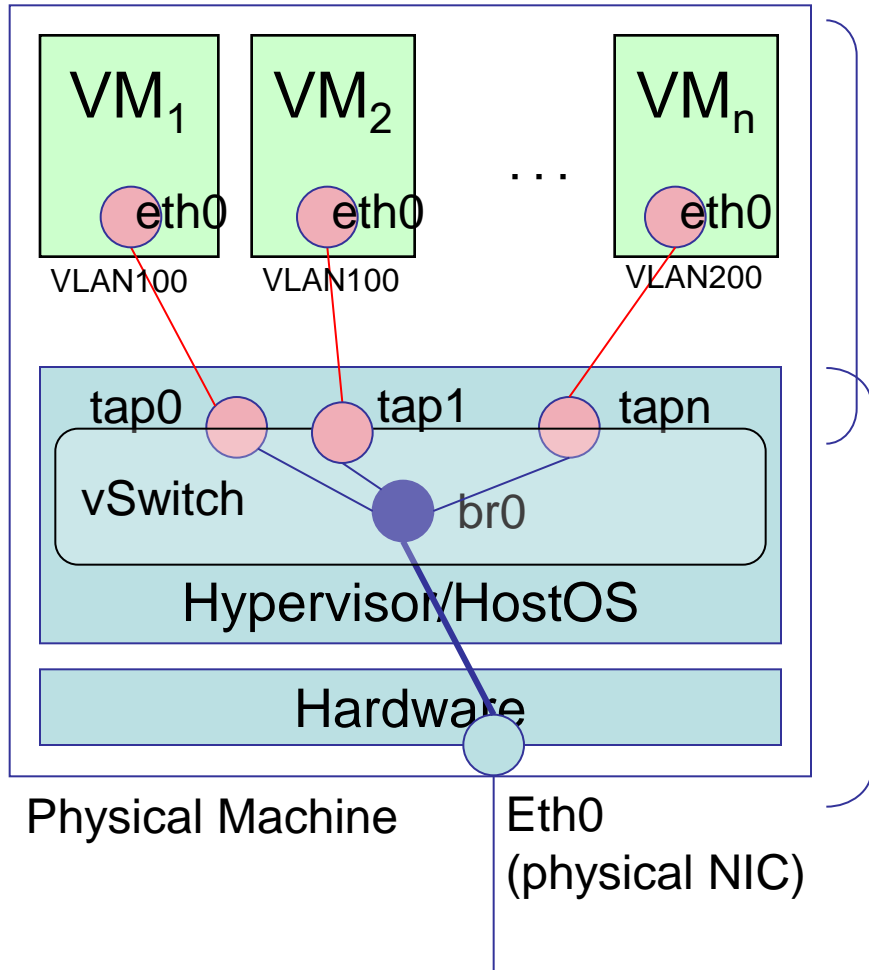

- VM – vSwitch
  - each VM has I/F (like eth0)
  - It is connected with tap device of Host OS
- vSwitch – physical NIC
  - Tap and bridge devices in vSwitch
  - The bridge device is connected with NIC

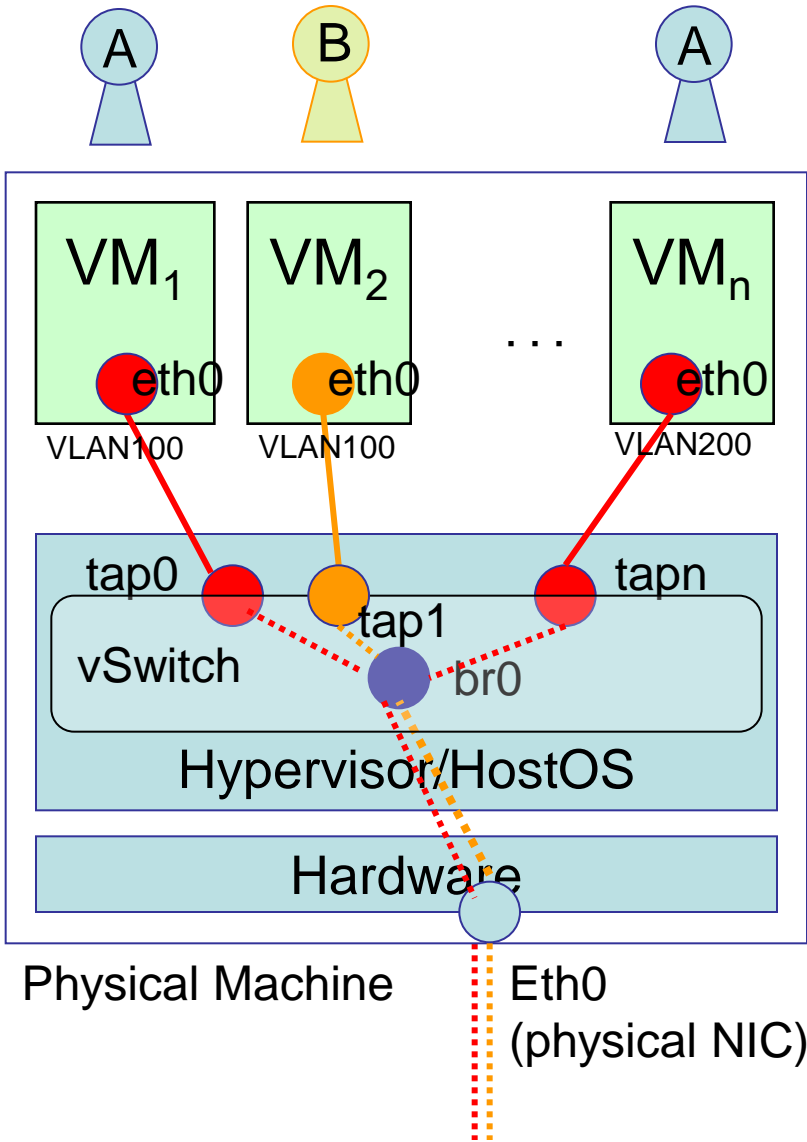


## ■ Tagged VLAN

- Some users share a physical machine
- Each user has to be separated from other users
  - Each user's VM has to be in same L2 segment


To meet above condition, tagged VLAN and vSwitch are needed.




- Shows a traffic topology in the physical server

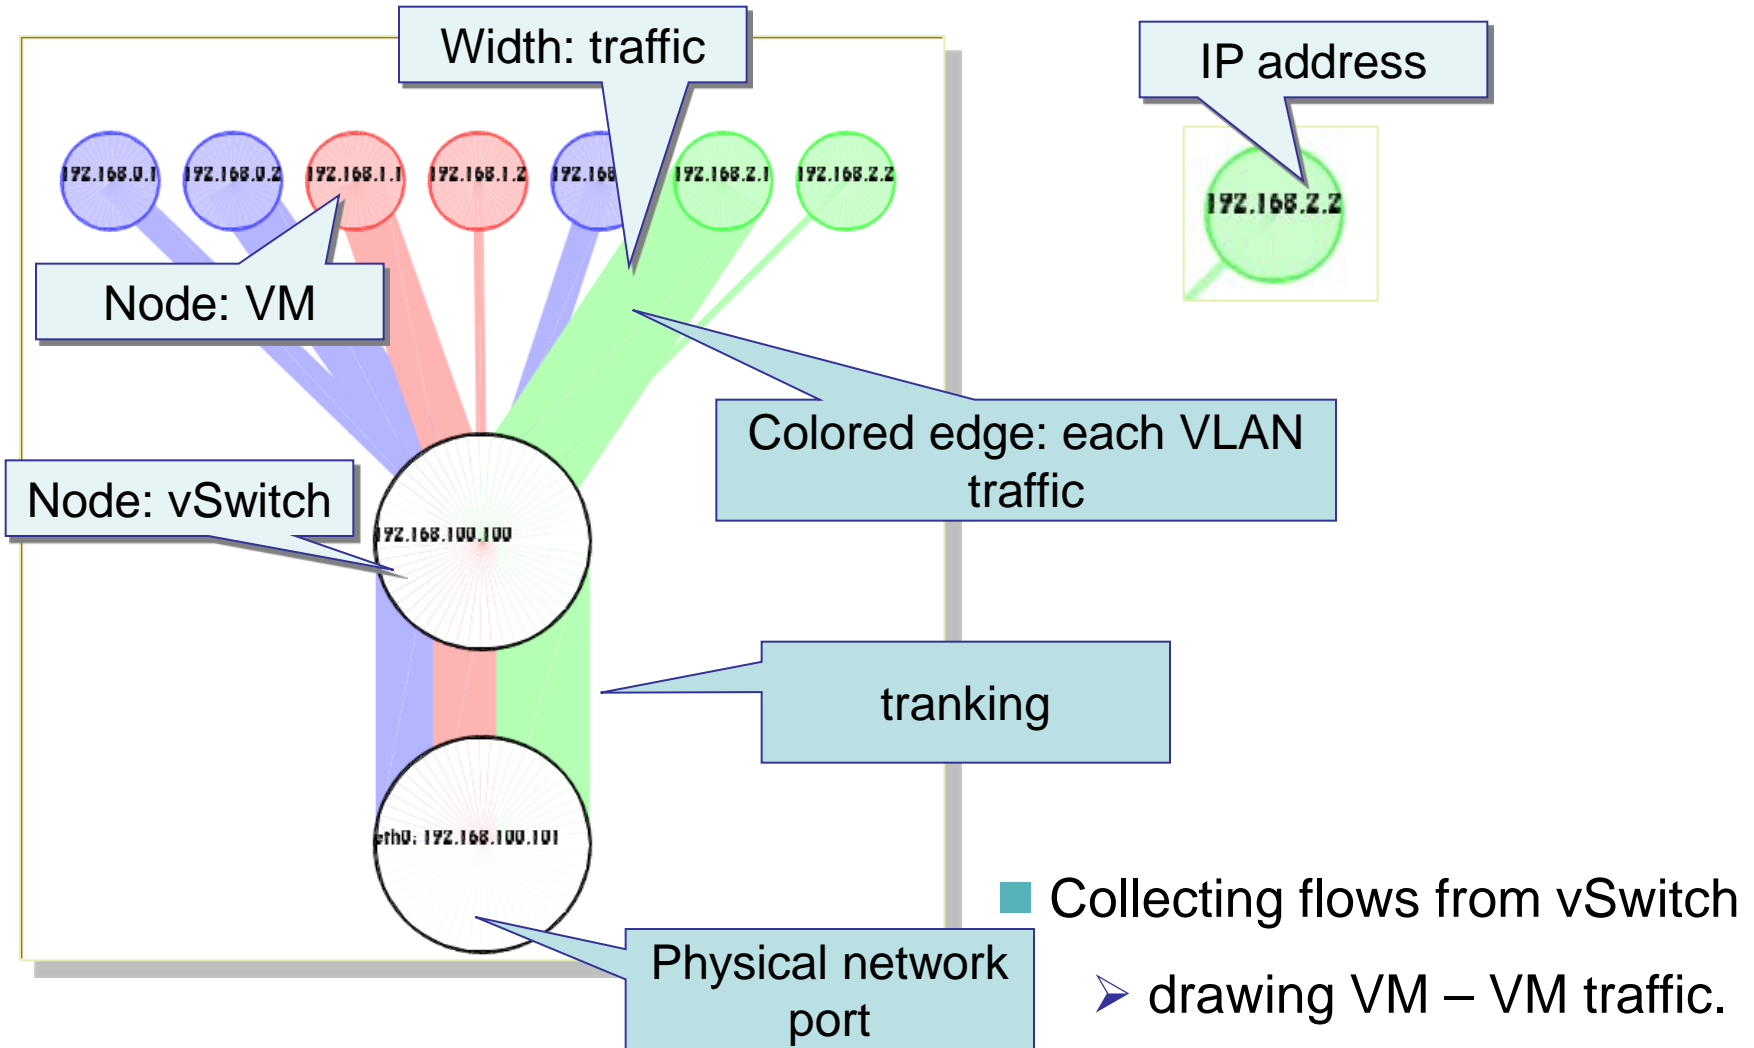

## ■ Finding a misconfiguration of VM and vSwitch

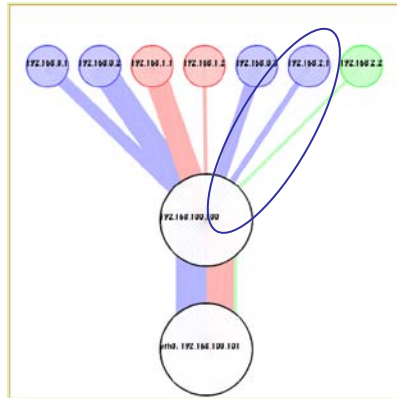


Abnormal case

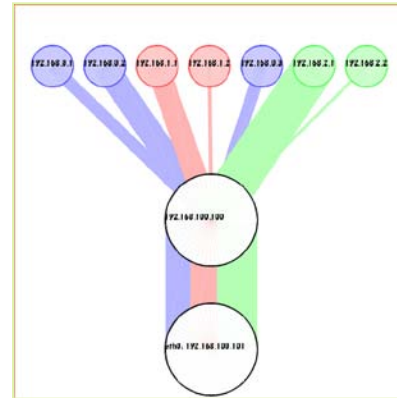

Normal case

## ➤ Finding VMs which should be moved in capacity planning and migration

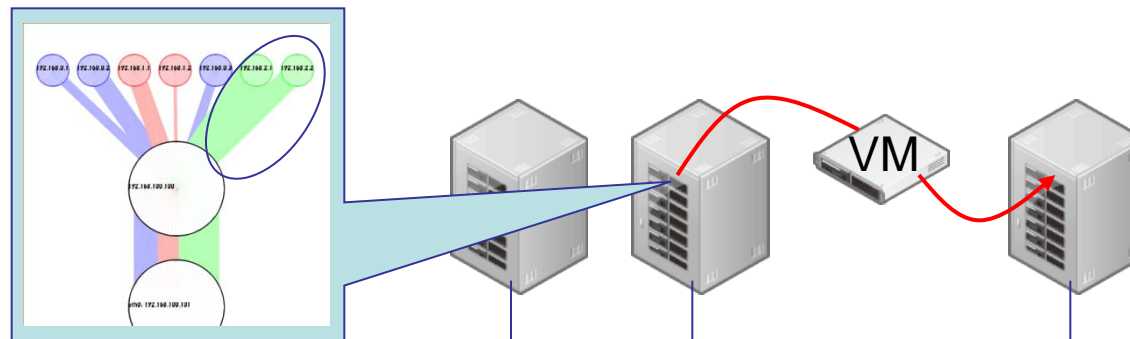


(extending the scope of visualization may be needed)

- Extending visualization scope to all of the server and network in our iDC.
  - The scope of the chart is only one physical machine now
  - Processing very large flow data
  
- Supporting next generation data center technologies
  - Not only basic VLAN (802.1Q) but also MAC-in-MAC (802.1aq/802.1ah) and VN-TAG (802.1Qbh)
  - using draft-kashima-ipfix-data-link-layer-monitoring-04
    - which is flexible IPFIX extension for all kinds of L2 components.
  
- Supporting changes of VLAN and VM location automatically
  - Live Migration, increase/decrease in the number of VMs
  - Linking resource DB

- We challenged to visualize inside and outside of our network by network topology charts using Flows.


## Type of chart

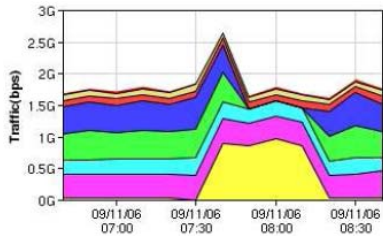

Line chart

## We can know...

A traffic change over the time  
(a part of a complicated network)

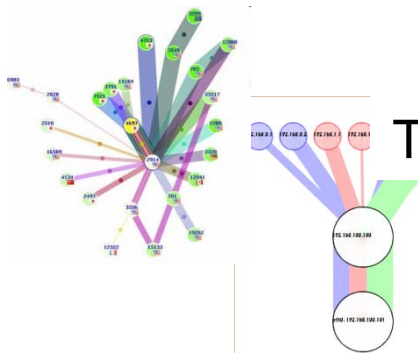

Topology chart

Relationships of each node  
and  
an overview of a complicated network.

The more complicate network we observe,  
the more important these topology charts.