

CMU/SEI-89-TR-20  
ESD-89-TR-28



Carnegie-Mellon University  
Software Engineering Institute

AD-A219 292

Version Description and Installation Guide  
Kernel Version 3.0

Judy Bamberger  
Timothy Coddington  
Robert Firth  
Daniel Klein  
Dave Stinchcomb  
Roger Van Scoy

December 1989

DTIC  
ELECTE  
MAR 15 1990  
S D CS D

**DISTRIBUTION STATEMENT A**  
Approved for public release  
Distribution Unlimited

**Technical Report**

CMU/SEI-89-TR-20

ESD-89-TR-28

December 1989

**Version Description and Installation Guide  
Kernel Version 3.0**



**Judy Bamberger  
Timothy Coddington  
Robert Firth  
Daniel Klein  
Dave Stinchcomb  
Roger Van Scoy**

**Distributed Ada Real-Time Kernel Project**

Accession For	
NTIS CRA&I	<input checked="" type="checkbox"/>
DTIC TAB	<input type="checkbox"/>
Unannounced	<input type="checkbox"/>
Justification	
By	
Distribution /	
Availability Codes	
Dist	Availability Codes
A-1	

Approved for public release.  
Distribution unlimited.



**Software Engineering Institute**  
Carnegie Mellon University  
Pittsburgh, Pennsylvania 15213

This technical report was prepared for the


SEI Joint Program Office  
ESD/AVS  
Hanscom AFB, MA 01731

The ideas and findings in this report should not be construed as an official DoD position. It is published in the interest of scientific and technical information exchange.

#### **Review and Approval**

This report has been reviewed and is approved for publication.

FOR THE COMMANDER



Karl H. Shingler  
SEI Joint Program Office

This work is sponsored by the U.S. Department of Defense.

Copyright © 1989 by Carnegie Mellon University.

This document is available through the Defense Technical Information Center. DTIC provides access to and transfer of scientific and technical information for DoD personnel, DoD contractors and potential contractors, and other U.S. Government agency personnel and their contractors. To obtain a copy, please contact DTIC directly: Defense Technical Information Center, Attn: FDRA, Cameron Station, Alexandria, VA 22304-6145.

Copies of this document are also available through the National Technical Information Service. For information on ordering, please contact NTIS directly: National Technical Information Service, U.S. Department of Commerce, Springfield, VA 22161.

Use of any trademarks in this report is not intended in any way to infringe on the rights of the trademark holder.

# Table of Contents

<b>1. Introduction</b>	<b>1</b>
1.1. Audience	1
1.2. Related Documents	2
1.3. Conventions	3
<b>2. Acquisition</b>	<b>5</b>
<b>3. Installation</b>	<b>7</b>
3.1. System Manager Actions	9
3.2. DARK Installation Actions	9
<b>4. Customization</b>	<b>13</b>
<b>5. Known Deficiencies</b>	<b>15</b>
<b>6. Changes from Previous Version</b>	<b>21</b>
<b>Appendix A. Bug Reporting</b>	<b>23</b>
A.1. Originating Kernel Bug Reports	23
A.2. Usage of DARK Bug Report Form Fields	23
<b>Appendix B. Bug Report Summary</b>	<b>31</b>
<b>Appendix C. INSTALL.COM</b>	<b>35</b>
<b>Appendix D. BUILD.COM</b>	<b>39</b>
<b>Appendix E. SEI Release Procedure</b>	<b>43</b>
E.1. New Release	43
E.2. Make a Release Tape	43
E.3. RELEASE.COM	44
E.4. GEN_RPTS.COM	46
E.5. MAKE_TAPE.COM	48
<b>Appendix F. Tape Contents</b>	<b>51</b>



## List of Figures

- Figure 3-1:** Hardware Configuration
- Figure 3-2:** Software Configuration

7  
7

# Version Description and Installation Guide

**Abstract:** This document characterizes a specific version of the Distributed Ada Real-Time Kernel (DARK) software artifact and supplies documentation for its installation and use. This document is geared toward: the engineer responsible for installing the Kernel, engineers responsible for porting and maintaining the Kernel, and engineers using the Kernel and needing an awareness of changes from the previous release.

## 1. Introduction

This document characterizes Version 3.0 of the Distributed Ada Real-Time Kernel (Kernel) and supplies documentation for its installation and use. The pertinent pieces of the Kernel environment are:

- The host system is a DEC VAX operating under VMS 5.0 (the specific host used at the SEI is a MicroVAX II operating under MicroVMS 5.0).
- The Kernel exists in two versions:
  1. An implementation in Ada using the TeleSoft Telegen2 V3.22 Ada Development System (of which, the OASYS XA68000 V4.12 Cross-Assembler is a part) targeted to the network of MC68020 processors and peripherals described in the *Kernel Architecture Manual*.
  2. An implementation in Ada using the VAX Ada V1.5 and VAX Macro targeted to the VAX-11 architecture running VMS V5.0.
- The *Kernel User's Manual* [KUM 89] provides the detailed information needed to understand and use Version 3.0 of the Kernel.

### 1.1. Audience

There are two groups of people who need the information in this document:

1. The engineer responsible for installing the Kernel.
2. Kernel users and those who need to know the changes from the previous release.

## 1.2. Related Documents

- [KFD 88] Bamberger, J., Colket, C., Firth, R., Klein, D., Van Scoy, R.  
*Kernel Facilities Definition.*  
Technical Report CMU/SEI-88-TR-16, ADA198933, Software Engineering Institute, Carnegie Mellon University, Pittsburgh, PA 15213.
- [DARK 88] Bamberger, J., Colket, C., Firth, R., Klein, D., Van Scoy, R.  
*Distributed Ada Real-time Kernel.*  
Technical Report CMU/SEI-88-TR-17, ADA199482, Software Engineering Institute, Carnegie Mellon University, Pittsburgh, PA 15213.
- [KUM 89] Bamberger, J., Coddington, T., Firth, R., Klein, D., Stinchcomb, D., Van Scoy, R.  
*Kernel User's Manual.*  
User Guide CMU/SEI-89-UG-1 Software Engineering Institute, Carnegie Mellon University, Pittsburgh, PA 15213.
- [KAM 89] Bamberger, J., Colket, C., Firth, R., Klein, D., Van Scoy, R.  
*Kernel Architecture Manual.*  
Technical Report CMU/SEI-89-TR-19, Software Engineering Institute, Carnegie Mellon University, Pittsburgh, PA 15213.
- [PORT 89] Bamberger, J., Coddington, T., Firth, R., Klein, D., Stinchcomb, D., Van Scoy, R.  
*Kernel Porting and Extension Guide.*  
Technical Report CMU/SEI-89-TR-40, Software Engineering Institute, Carnegie Mellon University, Pittsburgh, PA 15213.
- [TS 88] *TeleGen2 - The TeleSoft Second Generation Ada Development System for VAX/VMS to Embedded MC680X0 Targets User Guide.*  
TeleSoft, 1988.
- [OASYS 87] *OASYS User's Manual; Motorola 68000/10/20+68881 Cross-Assembler Development System.*  
OASYS, 1987.
- [DEC 84] *Guide to Using DCL and Command Procedures on VAX/VMS.*  
Digital Equipment Corp., September 1984.  
Order number: AA-Y501A-TE.
- [DEC 86] *MicroVMS User's Manual.*  
Digital Equipment Corp., April 1986,  
Order numbers: QLN55-GZ, Part 1 and Part 2, AI-FW62B-TN, Part 1, AI-FW63B-TN, Part 2.
- [VAX ADA] *VAX Ada Language Reference Manual.*  
Digital Equipment Corp., February 1985,  
Order number: AA-EG29A-TE.
- [VAX ADA DEV] *Developing Ada Programs on VAX/VMS.*  
Digital Equipment Corp., February 1985,  
Order number: AA-EF86A-TE.
- [VAX ADA RT] *VAX Ada Programmer's Run-Time Reference Manual.*  
Digital Equipment Corp., February 1985,  
Order number: AA-EF88A-TE.



### 1.3. Conventions

*Italic font* is used for all Kernel-specific items, such as package and primitive names.



## 2. Acquisition

The Kernel can be acquired from the Software Engineering Institute. For additional information, please contact:

**Judy Bamberger**  
**Software Engineering Institute**  
**Pittsburgh PA 15213**  
**412-268-5795**  
**ARPANET: bamberg@sei.cmu.edu**

The standard Kernel release package consists of:

- 1 Magnetic tape in 6250 bpi VHS Backup format
- 1 each of the following documents:
  - *Version Description and Installation Guide* (this document, [VDIG 89])
  - *Kernel Facilities Definition* ([KFD 88])
  - *Kernel Architecture Manual* ([KAM 88])
  - *Kernel User's Manual* ([KUM 89])
  - *Kernel Porting and Extension Guide* ([PORT 89])



### 3. Installation

This installation procedure will install both the VMS and 68020 versions. To compile, link, and execute the Kernel requires the hardware and software configurations shown in Figures 3-1 and 3-2.

Type	Required Items
Host	DEC VAX Magnetic tape drive (9 in or TK50)
Target	68020 configuration described in [KAM89] or another suitable bare-board 68020


Figure 3-1: Hardware Configuration

Type	Required Items
Host	VMS V5.1 VAX Ada V1.5 Backup V5.0 TeleSoft V3.22, VAX/VMS to Embedded MC680X0 Targets
Target	None All needed software contained in the TeleSoft package

Figure 3-2: Software Configuration

One optional DEC tool used by the development team is MMS, Module Management System, a standard VMS configuration tool. It is not required to install the Kernel, but a copy of the MMS description (i.e., the "make file") used to recompile the Kernel is included in the release.

The final directory structure generated by installing all three Kernel releases looks like:

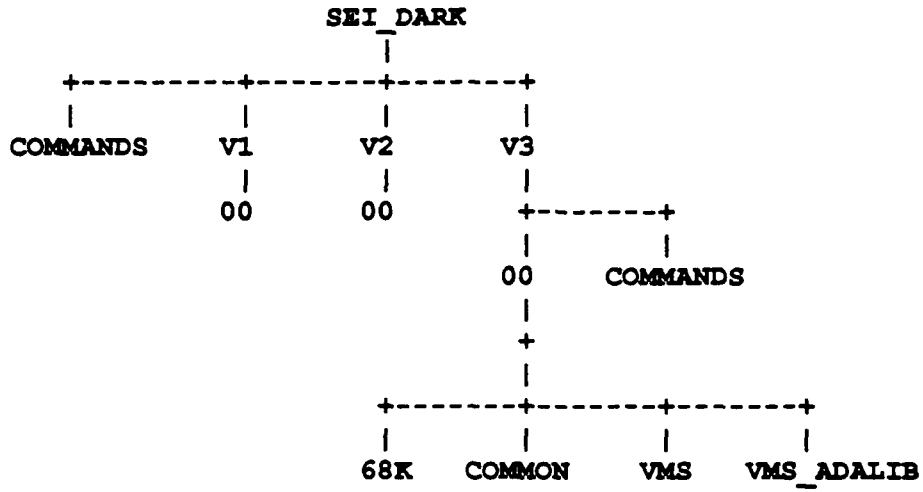

### 3.1. System Manager Actions

The following actions require system privileges and must be performed by the local system manager.

1. Create a new directory [SEI\_DARK]
  - a. The creation of this directory occurs only on the first release of DARK installed.
  - b. Ensure that all users who need access to the Kernel can access the [SEI\_DARK] directory (the required access modes are: *w:re* and *g:re*; the installation procedure will take care of the protection of the subdirectories).
2. The VMS version of the Kernel relies on having its own logical name table. To create the needed table:

```
SET PROC/PRIV=SYSPRV
CREATE/NAME_TABLE/PARENT=LNMS$SYSTEM_DIRECTORY/PROT=G:RWED LNMS$DARK_NAMES
SET PROC/PRIV=NOSYSPRV
```

- a. This table will need to be created when V3.00 is installed for the first time.
- b. This table will need to be re-created after every system reboot. The above CREATE command should be placed in the appropriate system startup command file to ensure this.

### 3.2. DARK Installation Actions

The following actions require no special privileges and can be performed anytime after the system manager actions are complete.

1. Log in to the VMS system.
2. Set your default to the SEI release directory:

```
SET DEF [SEI_DARK]
```

3. Create a logical name for the local tape drive:

```
DEFINE MT <tape-drive name>
```

The <tape-drive name> must be replaced by the appropriate device specification for the local system (at the SEI for example, this command looks like: DEFINE MT MUB0:). This equivalence will then be used by the DCL command scripts that perform the installation.

4. Physically load the release tape on the drive, allocate the tape drive, and mount the tape:

```
ALLOCATE MT:
MOUNT/NOUNL/FOR MT:
```

5. Unload the DCL command scripts and support files from the release tape:

```
BACKUP/LOG/REPLACE MT:SCRIPTS.BAK/SAVE *
```

A log message is displayed on the terminal for each file unloaded from tape.

6. Complete the release-tape processing by invoking INSTALL.COM (shown in Appendix C):

```
@INSTALL V3.00
```

INSTALL.COM will:

- a. Create the needed release directories.
- b. Move the command and support files into [SEI\_DARK.COMMANDS].
- c. Unload all the Kernel sources from the release tape.
- d. Generate a log message on the terminal for each step of the process.

7. Complete the installation process by building the VMS<sup>1</sup> and TeleSoft<sup>2</sup> compilation libraries from the new Kernel sources. This is done by invoking BUILD.COM (shown in Appendix D):

```
@ [SEI_DARK.V3.COMMANDS]BUILD V3.00
```

BUILD.COM will:

- a. Create a new VMS compilation library.
- b. Assemble all the VMS code and import it into the VMS library.
- c. Compile all Ada code into the VMS library.
- d. Create a new TeleSoft compilation library.
- e. Assemble all the 68020 code and import it into the TeleSoft library.
- f. Compile all Ada code into the TeleSoft library.
- g. Link the network processor software.
- h. Generate a log message on the terminal for each step of the process.

After completing the installation process:

- All the 68020-specific code resides in [SEI\_DARK.V3.00.68K].
- All the VMS-specific code resides in [SEI\_DARK.V3.00.VMS].
- All the common code resides in [SEI\_DARK.V3.00.COMMON].
- The TeleSoft compilation library resides in [SEI\_DARK.V3.00.68K].
- The VMS compilation library resides in [SEI\_DARK.V3.00.VMS\_ADALIB].

---

<sup>1</sup>The VMS build can only be performed if the VAX Ada V1.5 system is installed on the local system.

<sup>2</sup>The 68020 build can only be performed if the TeleSoft Ada V3.22 system is installed on the local system.



Some additional items of note:

1. In the event of a disaster, this same installation process can be used to regenerate any release from its release tape.
2. A listing of all the files contained on the tape is included as Appendix F of this document.
3. A listing of all the differences between V3.00 and V2.00 is not included in this document, but can be found in the configuration directory for the release. [SEI\_DARK.Vx.yy.zz]DIFFERENCES.RPT shows the differences between releases, and [SEI\_DARK.Vx.yy.zz]NEW\_FILES.RPT lists all the files new to this release.
4. An electronic version of the problem reporting form is contained in [SEI\_DARK.V3.COMMANDS]BUG.RPT.



## 4. Customization

Customization of the Kernel to accommodate the local environment and the application's needs are discussed in Chapter 3.3 and Appendix C of [KUM 89]. A complete discussion of the Kernel's target hardware configuration can be found in the *Kernel Architecture Manual*.



## 5. Known Deficiencies

The following bug reports document known problems, deficiencies, and issues related to V3.00 of the Kernel (both 68020 and VMS versions). Included is the bug report tracking number, a summary "title" of the issue, and a brief description of the issue. Information about the status of these bug reports is available on request.

- 0013\_SEI. Nproc won't permit single node reset  
This is a sporadic problem in the DARK testbed. It cannot be produced on a regular basis.
- 0019\_SEI. Process Index Table (PIT) sizing incorrect  
This is related to 0032\_SEI. It is an internal issue and should not manifest itself to users of the Kernel.
- 0032\_SEI. *GPTB.maximum\_number\_of\_processes* same  
See 0019\_SEI.
- 0033\_SEI. *die* and *kill* must release all resources  
Kernel primitives *die* and *kill* do not release semaphores, nor do they cancel any pending timeouts. As a result, the semaphores remain claimed, and the timeouts remain in the time event queue (and will expire silently when they occur).
- 0034\_SEI. alarm expiry does not cancel pending claim  
The expiration of an alarm does not cancel any pending claim of a semaphore. As a result, when an alarm expires, the claim is still pending, and it remains up to the user to release as appropriate.
- 0035\_SEI. *RM.initialize* time delays not accounted  
The Kernel currently does not propagate time delays around the network during initialization. These time deltas are to be computed using the logic analyzer. It has not been possible as yet to use the logic analyzer in such a manner as to obtain these time deltas. Therefore, during network initialization, when the Master Main Unit sends out the "go" message containing its view of time by which all subordinate Main Units initialize their clocks, the assumption is that there is zero time delta for each propagation of the "go" message.
- 0047\_SEI. more than one claim of same semaphore allowed (deadlock)  
A sure-case deadlock situation is *not* detected by the Kernel. A process may request to claim a semaphore that it already has claimed. Depending on how *MM.claim* is called (i.e., with a timeout or not), this could result in a deadlock.
- 0048\_SEI. overwrite old messages on queue overflow not implemented  
The only option for handling messages is to drop the newest message. The other required (per [KFD]) option, to overwrite oldest messages, is not provided.
- 0050\_SEI. *GIG.interrupt\_table* defaults misleading  
The current initial state of the Interrupt Table allows an application to bind to any interrupt not previously bound by the Kernel itself, including interrupts required by the Ada runtime. This potentially allows an application to act in a manner destructive of the integrity of the Kernel and Ada runtime. For the present, the application user should take care to bind only those interrupts

explicitly commented in internal Kernel package *inames* as available to the applicaiton, and any interrupts for devices that are part of the application-specific hardware.

- 0059\_SEI. *check\_message*, *discard\_message* primitives required

To provide a clean interface between the Kernel primitives and the typed message passing described in [KUM 89], these two additional primitives should be provided. This interface would be a nice extension to the Kernel.

- 0072\_SEI. size of Kernel datagram not computed correctly

The size of a Kernel datagram is tied to the size of an entry in the NCT. In the delivered configuration, with all generic parameters set as provided, this will not cause a problem. The problem will arise when/if the settings are such that another Kernel-to-Kernel message is larger than an NCT entry message. One simple case of this is the "process created" message, which contains the logical (i.e., string-valued) name of the Kernel process being created. If that logical name is sufficiently larger than the NCT entry, it is likely that an internal error may occur. Thus, extreme caution should be used when modifying the values of:

- *GPMG.maximum\_length\_of\_process\_name\_value*
- *GNC/NC.maximum\_length\_of\_processor\_name\_value*

- 0076\_SEI. Time event queue performance improvements

Resources did not allow for requisite analysis and ensuing performance improvements of the algorithms that manipulate the time event queue. The key assumptions are identified, along with a number of alternatives to improve performance if required. These improvements would be a nice extension to the Kernel.

- 0077\_SEI. *CM.alloc\_device\_receiver* doesn't check if local PID

*GCM.allocate\_device\_receiver* does *not* check to ensure that the target process ID to be allocated to receive incoming messages from a non-Kernel device is, in fact, a locally created process.

- 0078\_SEI. *DGM.alloc\_dg* selection of datagrams from large queue

THIS IS A VMS VERSION OF 0069\_SEI, WHICH WAS REPORTED AND FIXED IN 68020 VERSION.

There is a bug in *DGM.alloc\_dg*. The behavior is supposed to be as follows: when a small message (i.e., one that fits in a small datagram) is sent, *alloc\_dg* is supposed to dequeue a small datagram. If there are none available, *alloc\_dg* is supposed to return a large datagram, and then as a last resort, a Kernel datagram.

- 0079\_FER. use of *standard.long\_integer*

Use of package *standard* type *long\_integer* was detected in the following packages when porting the 68020 Kernel to the Rational: *MZ8305\_definitions*, *PIO.to\_PIO\_control\_ptr*, function *unchecked\_conversion* instantiation change to *Hl.hw\_long\_integer*.

- 0080\_FER. long/short name mismatch (*to\_kernel\_time*)  
Mismatch of long name and short name in specification and body (respectively) of *generic\_time\_globals.to\_kernel\_time* (*elapsed\_time* parameter).
- 0083\_SEI. CM specification exceptions not equal to raised exceptions  
Spec comments for *generic\_communication\_management* not complete or incorrect. Note the following inconsistencies.
  1. *Message\_timed\_out* is not explicitly raised in *gcm\_body*.
  2. *Network\_failure* is not raised explicitly in *gcm\_body*.
  3. In several places, reference is made to the subprogram *allocate\_device*; however, there is no such subprogram.
  4. *Receiver\_dead* can be raised during a call to *send\_message*.
  5. *Replacing\_previous\_allocation* is explicitly raised in *allocate\_device\_receiver* and not in *allocate\_device*.
- 0084\_SEI. specification documentation not equal to code implementation  
The following specs contain documentation that does not match the code it is supposed to be describing:
  - (*generic\_*)*network\_configuration*:
    - *NCT, logical\_name*: initial value is all blanks (not "none")
  - *generic\_process\_table*:
    - *semaphore*
      - *number\_of\_waiting\_processes*: may also be decremented by *die/kill* (once BR 0033\_SEI is fixed)
      - *queue\_head*: may also be reset by *die/kill* (once BR 0033\_SEI is fixed)
      - *sema\_previously\_claimed*: may also be reset by *die/kill* (once BR 0033\_SEI is fixed); style of documentation not similar to others; missing who sets/resets
  - *process\_identifier*: isn't it set to null now when pruning, per BR 0055\_SEI?
  - *process\_attributes.process\_initialization\_status*: documentation is wrong; only discusses "declared" and "created"; needs "remotely\_created"
  - *schedule\_attributes.next*: no documentation about changes
  - *communication\_attributes.maximum\_message\_queue\_size*: modified by *die/kill*
  - *communication\_attributes.message\_queue*: modified by *die/kill*
  - *communication\_attributes.current\_send\_buffer*: modified by *die/kill*
  - *pending\_activity\_attributes.pending\_activity*: reset by *die/kill* (once BR 0033\_SEI is fixed)

- *pending\_activity\_attributes.current\_pending\_message*: for "safety," should this be reset for *die/kill*?
  - *pending\_activity\_attributes.current\_receive\_buffer\_address*: incomplete documentation; need to reset for *die/kill*
  - *pending\_activity\_attributes.current\_receive\_buffer\_size*: incomplete documentation; need to reset for *die/kill*
  - *pending\_activity\_attributes.alarm\_event\_ID*: reset by *die/kill* (once BR 0033\_SEI is fixed)
  - *pending\_activity\_attributes.alarm\_resumption\_priority*: reset by *die/kill* (once BR 0033\_SEI is fixed)
  - *acknowledged\_message\_information.\**: interaction with *die/kill* (once BR 0033\_SEI is fixed)
  - *semaphore\_attributes.sema\_last\_claimed*: set/use information missing
  - *semaphore\_attributes.\**: interaction with *die/kill* (once BR 0033\_SEI is fixed)
- *datagram\_globals*:
    - comment before type *datagram* is ...: missing comment about "local"
    - comment before header description: missing comment about "local"
    - general concern: use of "we"
- *generic\_interrupt\_globals*:
    - *interrupt\_table* documentation is incomplete
    - set/used information is not present.
- 0085\_SEI. subset of 0084\_SEI that MUST be FIXED  
the following specs contain documentation that does not match the code it is supposed to be describing:
    - (*generic\_*)*network\_configuration*:
      - *NCT\_logical\_name*: initial value is all blanks (not "none")
    - *generic\_process\_table*:
      - *process\_attributes.process\_initialization\_status*: documentation is wrong; only discusses "declared" and "created"; needs "remotely\_created"
      - *semaphore\_attributes.sema\_last\_claimed*: set/use information missing
- *datagram\_globals*:



- comment before type datagram is ...: missing comment about "local"
  - comment before header description: missing comment about "local"
  - general concern: use of "we"
- *generic\_interrupt\_globals*:
    - *interrupt\_table* documentation is incomplete
    - set/used information is not present.



## 6. Changes from Previous Version

A log of all the new files can be found on the release tape in file NEW\_FILES.RPT. A line-by-line listing of the differences between V2.00 and V3.00 can also be found on the release tape, in file DIFFERENCES.RPT. These report files are loaded into the configuration directory, along with all the Kernel sources, as part of the installation process.

In addition, the following bug reports document problems detected in V2.00 and corrected in the V3.00 release.

- 0016\_SEI. GQM performance is linear Actual fix exists, but was not completed in time to make it into the V2.00 release.
- 0037\_SEI. tool interface not implemented  
Package tool\_interface is not provided with V2.00 of the Kernel. However, all key data structures are potentially visible (the application may import them via appropriate WITH clauses) and use appropriate \*\_debug print routines to view the contents of them. In no case should the application attempt to modify the contents of any internal Kernel data structure, as that would invalidate the assumptions the Kernel makes about its own state.
- 0040\_SEI. check for null process ID as input parameter  
The Kernel does *not* verify that the input process ID values are not null (e.g., communication\_management subprograms, send\_message and send\_message\_and\_wait). As a result, if an application does not *declare* a process ID to the Kernel, a constraint error may be raised when calling these Kernel primitives.
- 0049\_SEI. valid process ID for sender/receiver  
See 0040\_SEI.
- 0069\_SEI. DGM.alloc\_dg selection of datagrams from large queue  
Under heavy load situations, it appears that when the Nproc queue of small datagrams is exhausted, the Nproc dies instead of beginning to select datagrams from the queue of large datagrams. This may have been fixed as a side effect of fixes to other communication-related bug reports, but this has not yet been tested to our satisfaction.
- 0081\_SEI. GPAR short names  
The modules generic\_process\_attribute\_readers and gpar\_body do not follow the Kernel style guideline of using short names.
- 0082\_SEI. TI.begin/end to check illegal process ID  
Bug reports 0040\_SEI and 0049\_SEI are completed with the exception of the changes necessary to TI.begin\_collection and TI.cease\_collection. In order to close the open reports, this report is being filed to keep track of the remaining items on the list. These remaining items are still in violation of [KFD] 10.1.31.  
All DARK primitives that accept a process identifier as an input parameter should check for an uninitialized process identifier (they needn't check for an illegal one, just uninitialized). The affected primitives still not done are: TI.begin\_collection and TI.cease\_collection.
- 0085\_SEI. VMS problem elaborating generics

Code that previously worked under TeleSoft/MC68020 now fails under VMS with the unhandled exception PROGRAM\_ERROR.

The reason is that the Ada initialization code is attempting to perform generic instantiations before elaborating the corresponding generic bodies, this is erroneous under [RM 12.2(3)].

The reason this problem has not been seen before is that the VMS compiler elaborates program units in a different order than does the TeleSoft compiler. This is legitimate—such freedom is granted by [RM 10.5(2)].

- 0086\_SEI. AST encaps setting interrupt\_nesting wrong  
In the VMS version only, the AST encapsulation does not correctly set the interrupt\_nesting level. This causes DARK code called from an AST handler to fail.
- 0087\_SEI. create/use DARK\_text\_io (I/O being interrupted may be corrupting the stack)  
In the VMS implementation, the Ada I/O routines [RM 14] do not seem to be properly reentrant. Thus, if a DARK process is suspended during a call of an I/O operation, and another process then calls the same or another I/O routine, the Ada run time goes wrong and the DARK program fails in strange ways.
- 0089\_SEI. AST encaps must fully save/restore context  
The VMS AST encapsulation handler, am.ast\_handler\_encapsulation, contains an error. The effect of this error is that, if an AST occurs in the middle of an interruptable instruction, the processor state is not fully saved and restored.

The following outstanding bug reports reference changes required to the *Kernel User's Manual*. These are integrated into the [KUM89], which accompanies the V3.00 release of DARK.

- 0029\_SEI. KUM words too weak about set\_alarm behavior
- 0038\_SEI. text\_io blocks; interferes with Kernel (KUM)
- 0040\_SEI. check for null process ID as input parameter
- 0045\_WIT. KUM initialization\_order example confusing
- 0046\_WIT. KUM typos
- 0049\_SEI. valid process ID for sender/receiver
- 0052\_SEI. KUM, 4.13.3, sync not allowed in i/h
- 0061\_WIT. KUM.get\_clock used but not in Kernel specifications anywhere
- 0062\_WIT. KUM tailoring parameter description missing

## Appendix A: Bug Reporting

### A.1. Originating Kernel Bug Reports

Bugs are reported in the same manner, no matter what their source (e.g., internal SEI, DARK development team, acceptor site). Complete the first page (the first four sections on the figure) of the attached bug report form is completed, either manually or electronically. The bug report is then sent to the correct place at the SEI. For bugs submitted by Email, there is a *dark\_bugs* account, which will be examined daily by the Bug Report Database Maintainer. For bugs submitted via U.S. postal service, there is a *dark\_bugs* mail stop, which will be checked daily by the Bug Report Database Maintainer. For bugs submitted from within the SEI, either of the two methods above are acceptable, as well as Campus Mail to the Bug Report Database Maintainer. In any case, the DARK bug reports will make it to the Bug Report Database Maintainer.

### A.2. Usage of DARK Bug Report Form Fields

1. *Contact information to be completed by bug report originator when the bug report is generated.*
  - a. **Reported by:** Name of the originator of the bug report. This field must be completed.
  - b. **Phone:** Phone number(s) where the originator of the bug report may be reached. This field must be completed.
  - c. **Email address:** The electronic mail address of the originator of the bug report. This field must be completed if the originator has Email access to the SEI.
  - d. **Full address:** Address to which any hard-copy correspondence about the bug or about DARK should be sent. This field must be completed by all non-SEI originators of bug reports.
  - e. **Date reported:** Date (yyymmdd) when the bug report is generated. This field must be completed.
  
2. *Problem description information to be completed by bug report originator when the bug report is generated.*
  - a. **Severity:** The impact the bug has on the bug originator. Options include:
    - i. **Stopped dead:** Use of Kernel artifacts cannot continue; no workarounds, acceptable or not, are available.
    - ii. **Significant:** Use of Kernel artifacts are severely affected; no acceptable workaround found, but can get by for now.
    - iii. **OK workaround:** Use of Kernel artifacts hindered; acceptable workaround found, but would rather have the real capability.

- iv. **FYI:** Use of Kernel artifacts unaffected, but this bug was found.

This field must be completed.

- b. **Problem description:** A brief yet complete description of the observed problem (i.e., what is "broken").
- c. **Proposed solution:** A brief statement of the anticipated fix (used for planning). This field should be completed by the originator of the bug report if the originator has a proposed solution; otherwise, this field need not be completed.
- d. **Alternative(s):** A brief statement of any alternatives found by the originator of the bug report to "workaround" the bug. This field should be completed by the originator of the bug report if the originator has found an alternative; otherwise, this field need not be completed.

3. *Discovery information to be completed by the bug report originator when the bug report is generated.*

- a. **How discovered:** Indication of how the problem was discovered. This takes into consideration the strategy used to discover the bug and the diagnostic tools used.

Strategies include:

- i. **Inspection:** Visual examination of the artifacts.
- ii. **Compilation:** Compiling the Kernel or any piece of code that imports the Kernel specifications.
- iii. **Execution:** Execution of any piece of code that uses Kernel capabilities.
- iv. **Formal proof:** Doing or examining the proof.
- v. **Other:** Provide description.

Diagnostic tools include:

- i. **Unit test case:** Indication that unit testing caused the bug to surface.
- ii. **System test case:** Indication that system testing caused the bug to surface.
- iii. **Application:** Indication that other code caused the bug to surface.
- iv. **Other:** Provide description.

This matrix must be completed.

- b. **Diagnostic tool:** Exact description of the tool that caused the bug to surface. Wherever possible, this should include a description or a copy of the program or process by which the problem can be reproduced to facilitate reproduction of the same problem on the DARK testbed at the SEI. This field must be completed.

4. *Identification of DARK artifacts information to be completed by the bug report originator when the bug report is generated.*

- a. **DARK artifact and version:** Full identification of the DARK artifact (e.g., document name, Kernel package name) and version identification (including date of issue). This field must be completed.
- b. **Files:** List of source files to which the bug has been tracked. This field should be completed by the originator of the bug report if the originator has determined this information; otherwise, this field need not be completed.

5. *SEI tracking information to be completed immediately by the maintainer of the bug report database when the bug report is entered into the database.*

- a. **Bug number:** Bug numbers are of the form nnnn\_XXX, where:
  - i. nnnn is some number in the range 0001 .. 9999.
  - ii. XXX is a site-unique, three-letter acronym indicating the organization that originated the bug report. Examples include: SEI for the Software Engineering Institute, WEC for Westinghouse Electric Corporation.

This field must be completed.

- b. **Date received:** Date (yymmdd) received at the SEI. This field must be completed.
- c. **Related bug reports:** Possibly amended when the bug is closed. Enumeration of any bug reports related to this one or opened via this one, and their status when closing this one; "n/a" if there are none. This field must be completed.
- d. **Related design decisions:** Possibly amended when the bug report is closed. Enumeration of any design decisions related to this one, opened via this one, and their status when closing this one; "n/a" if there are none. This field must be completed.
- e. **Defect category:** Options include:
  - i. **Requirements:** There is something wrong (missing, contradictory, incomplete, etc.) with the Kernel requirements. Applicable artifacts: [KFD].
  - ii. **Design:** There is something wrong (missing, contradictory, incomplete, etc.) with the Kernel design. Applicable artifacts: [KAM], structure of Kernel code.
  - iii. **Code:** There is something wrong (missing, extra, etc.) in the Kernel code (Ada or assembly language). Applicable artifacts: code, test cases.
  - iv. **Documentation:** There is something wrong (missing, contradictory, incomplete, etc.) with the in-line documentation of the code (Ada or assembly language). This includes all header commentary. Applicable artifacts: code.
  - v. **Document:** There is something wrong (missing,

contradictory, incomplete, etc.) with a Kernel document.  
Applicable artifacts: [KFD], [KAM], [KUM], [VDIG].

This field must be completed.

6. *DARK work assignment information to be completed within five working days of receipt of the bug report.*

- a. **Assigned to:** Name of DARK team member responsible for making the fix, verifying the fix, and leading the effort to close out the bug report, all related bug reports, and all related design decisions. This field must be completed.
- b. **Date assigned:** Date (yymmdd) when the bug is assigned to a DARK team member for fixing. This field must be completed.
- c. **Priority:** Completed when the bug is assigned to a DARK team member for fixing. Options include:
  - i. **High:** Fix these first.
  - ii. **Medium:** Fix these next.
  - iii. **Low:** Fix these if and only if there is time.

This field must be completed.

- d. **Due date:** Date (yymmdd) by which the fix must be completed. This field must be completed.

7. *Actual fix information to be completed by the DARK team member assigned to fix the bug.*

- a. **Proposed fix:** Brief description of the anticipated fix and enumeration of any reasonable alternatives and why these alternatives may need to be taken instead (used for planning). This should be completed within five working days of being assigned responsibility for fixing the bug and before the actual fix is applied. This also includes identifying any workarounds that can be taken by the user community to avoid the bug if the fix cannot be applied in time. This field must be completed.
- b. **Actual fix:** Description of the actual fix. This field must be completed.
- c. **Actual fix date:** Date (yymmdd) the DARK team member completed the fix. This field must be completed.
- d. **Directories:** Indication of the DARK artifacts affected by the fix. This field must be completed.
- e. **Files:** Indication of all files affected by the fix. This field must be completed.
- f. **Problem:** The actual problem (which may be identical to the reported problem description). This field must be completed.
- g. **Solution:** The actual solution (which may be identical to the reported proposed solution). This field must be completed.



8. *Closing information to be completed by the Configuration Control Board (CCB)<sup>3</sup> when the bug report is ready to be closed.*

- a. **Close date:** Date (yymmdd) the bug report is verified as being closed. This field must be completed.
- b. **Verified by:** Name of the CCB member verifying the bug as being closed. This field must be completed.
- c. **How verified:** Indication of what criteria were used to verify the fix was made as reported (e.g., inspection of documentation, examination of test case results). This field must be completed.
- d. **Checklist:** Helpful clues for the CCB and the bug fixer to ensure that all propagated and related modifications have, in fact, been made. This field is optional.

9. *Available version information to be completed when the next deliverable version of the relevant project artifact is generated.*

- a. **Available in DARK version:** Completed by the DARK project leader when planning for the next release. This field must be completed.
- b. **Applicable VDIG version and section:** Completed by the individual responsible for generating the VDIG portion of the KUM in preparation for release of the Kernel. This field must be completed.

---

<sup>3</sup>The CCB currently comprises the DARK project leader and the maintainer of the DARK project bug report database.

D A R K   B U G   R E P O R T   F O R M   (Part 1)

Reported by :  
 Phone :  
 Email address :  
 Full address :  
 (external only) :  
 :  
 :  
 :  
 Date reported :

Severity : Stopped dead() Significant () OK work-around() FYI ()  
 Problem description :  
 Proposed solution :  
 Alternative(s) :

How discovered	S T R A T E G Y					
	T O O L	Inspctn	Compltn	Executn	Formal Proof	Other
Unit Test						
System Test						
Application						
Other						

Diagnostic tool :

DARK artifact :  
 and version :  
 Files :

---

---

D A R K   B U G   R E P O R T   F O R M   (Part 2)

---

---

Bug number :  
Date received :  
Related bug :  
    reports :  
Related design :  
    decisions :  
Defect category : Requirements() Design() Code() Documentation() Document()  
-----  
Assigned to :  
Date assigned :  
Priority : High() Medium() Low()  
Due date :  
-----  
Proposed fix :  
Actual fix :  
Actual fix date :  
Directories :  
Files :  
Problem :  
Solution :  
-----  
Close date :  
Verified by :  
How verified :  
Checklist : KFD() KAM() KUM()  
          : KS(): Module contents() References() History() Notes()  
          : IKS(): Module contents() References() History() Notes()  
          : Subprogram header(): Req() Prim() Time() Parameters()  
          :                            Precon() Actions() Postcon()  
          :                            Errors() Examples() Notes()  
          : Body(): PDL()  
-----  
Available in :  
    DARK version :  
Applicable VDIG :  
    version and :  
    section :

---

---

Send this form to:           DARK BUGS  
                              c/o Judy Bamberger  
                              Software Engineering Institute  
                              Pittsburgh PA 15213  
                              412-268-5795  
                              Email: dark-bugs@sei.cmu.edu



## Appendix B: Bug Report Summary

This appendix summarizes all known Kernel problems. It provides the following information:

- BR#: bug report tracking number.
- Stat: status of the bug report:
  - clo: closed. The problem has been corrected in the current released version of the Kernel.
  - asg: assigned. The problem has been assigned to a project member for further study.
  - una: unassigned. The problem has been identified, but no one is currently studying the problem.
- Assignee: the user id of the individual assigned to fix the problem.
- Title: a brief one-line description of the problem.

A full bug report on any problem listed below is available on request.

BR#	stat	assignee	title
0001_SEI	clo	firth	GIM documentation (error checking)
0002_SEI	clo	firth	GIM.disable extra checking
0003_SEI	clo	rlvs	default timeslice quantum not tailorable
0004_SEI	clo	dvk	GISM documentation (quantum is MINimum)
0005_SEI	clo	rlvs	GIM.synchronize without timeout needed
0006_SEI	clo	bamberg	GST documentation (priority model)
0007_SEI	clo	bamberg	GPAR documentation (exceptions)
0008_SEI	clo	dvk	ST documentation (old generics)
0009_SEI	clo	firth	GIM documentation (read_clock)
0010_SEI	clo	bamberg	GPTB documentation (stack_high_address)
0011_SEI	clo	firth	GKT documentation (should be 150_000 years)
0012_SEI	clo	bamberg	GPAM documentation (exceptions)
0013_SEI	asg	dvk	Nproc won't permit single node reset
0014_SEI	clo	tac	GCM print to be removed
0015_SEI	clo	tac	send_message_and_wait with zero timeout
0016_SEI	clo	rlvs	GCM performance is linear
0017_SEI	clo	rlvs	GAM doesn't remove TEQ pending alarm event

0018_SEI	clo	rlvs	unneded layer of code with timers
0019_SEI	asg	rlvs	PIT sizing incorrect
0020_SEI	clo	rlvs	documentation of decl/create_process
0021_SEI	clo	tac	send_* to accommodate tag-only msg better
0022_SEI	clo	rlvs	code reorg PIT/GNC
0023_SEI	clo	rlvs	update intro to KFD
0024_SEI	clo	rlvs	update primitive part of KFD
0025_SEI	clo	tac	GCM/bus_ic, local optimizations, ACK/NAK
0026_SEI	clo	tac	priority inversion for send/receive
0027_SEI	clo	firth	send of large message = constraint_error
0028_SEI	clo	firth	provide traceback when process dies
0029_SEI	clo	bamberg	KUM words too weak about set_alarm behavior
0030_SEI	clo	rlvs	implement non-Kernel devices
0031_SEI	clo	rlvs	synchronize doesn't work from Main Unit
0032_SEI	asg	rlvs	GPTB.maximum_number_of_processes same
0033_SEI	asg	rlvs	die/kill must release all resources
0034_SEI	asg	rlvs	alarm expiry does not cancel pending claim
0035_SEI	asg	rlvs	initialize time delays not accounted
0036_SEI	clo	firth	floating point coprocessor state not saved
0037_SEI	clo	rlvs	tool interface not implemented
0038_SEI	clo	bamberg	text_io blocks; interferes with Kernel (KUM)
0039_SEI	clo	dvk	make Nproc statistics available
0040_SEI	clo	dvk	check for null process ID as input parameter (code) (documentation)
0041_SEI	clo	tac	initial asynchronous send is lost
0042_SEI	clo	rlvs	die called within receive DG i/h
0043_SEI	clo	rlvs bamberg	KFD changes: chapters 5, 6, 7 KFD changes done; KUM must be examined for possible impacts
0044_SEI	clo	drs	data lost for longword+1 length messages
0045_WIT	clo	bamberg	KUM initialization_order example confusing
0046_WIT	clo	bamberg	KUM typos

```

-----
0047_SEI asg   firth   >1 claim of same semaphore allowed (deadlock)
-----
0048_SEI asg   tac     overwrite old msgs on queue ovfl not impld
-----
0049_SEI clo   dvk     valid process ID for sender/receiver
         (code)
0049_SEI clo   bamberg  valid process ID for sender/receiver
         (documentation)
-----
0050_SEI asg   firth   GIG.interrupt_table defaults misleading
-----
0051_SEI clo   firth   GIG can_preempt documentation confusing
-----
0052_SEI clo   bamberg  KUM, 4.13.3, sync not allowed in i/h
-----
0053_SEI clo   rlvs    KFD reqs changes chapters 8 - 10
         bamberg  KFD changes done; KUM must be examined for
         possible impacts
-----
0054_SEI clo   rlvs    KFD reqs changes chapters 11 - 13
         bamberg  KFD changes done; KUM must be examined for
         possible impacts
-----
0055_SEI clo   rlvs    process table purge is incomplete
-----
0056_SEI clo   rlvs    if > 2 nodes, thru packets are lost (nproc)
-----
0057_SEI clo   firth   priority=0 not tested before call to Schedlr
-----
0058_SEI clo   firth   claim w/no timeout doesn't set event id
-----
0059_SEI una                check_msg, discard_msg prims required
-----
0060_SEI clo   tac     C_body.clock_count comment incorrect
-----
0061_WIT clo   bamberg  KUM.get_clock used but not in KS anywhere
-----
0062_WIT clo   bamberg  KUM tailoring parameter description missing
-----
0063_SEI clo   rlvs    GNC.allocated_process_ID def valu docn wrong
-----
0064_SEI clo   drs    modify DARK testbed value of lowest_pri_valu
-----
0065_SEI clo   firth   irupt encaps not save/restore flt context
-----
0066_SEI clo   firth   modify LLH.being/end atomic
-----
0067_SEI clo   firth   irupt encaps forgot to use privlg mode
-----
0068_SEI clo   firth   irupt encaps assumes slow irupts not nest
-----
0069_SEI clo   tac     DGM.alloc_dg selectn of datagrams fm large Q
-----
0070_SEI clo   tac     too many calls to SCH.schedule in GCM
-----
0071_SEI clo   firth   obsolete docn in IG
-----
0072_SEI asg   tac     size of Kernel dgram not computed correctly
-----
0073_SEI clo   rlvs    should TM.sync be blocking?

```

```

-----
0074_SEI clo    tac    constraint error/mismatch of data types
-----
0075_SEI clo    rlvs   SCH run queue performance improvements
-----
0076_SEI una                    TEQ performance improvements
-----
0077_SEI una                    CM.alloc_dev_rcvr doesn't check if local PID
-----
0078_SEI una                    DGM.alloc_dg selectn of datagrams fm large Q
-----
0079_FER una                    use of standard.long_integer
-----
0080_FER una                    long/short name mismatch (to_Kernel_time)
-----
0081_SEI clo    dvk    gpar short names
-----
0082_SEI clo    rlvs   TI.begin/end to check illegal process ID
-----
0083_SEI una                    CM.specs.exceptions /= raised exceptions!
-----
0084_SEI una                    spec docn /= code impln!
-----
0085_SEI clo    rlvs   VMS problem elaborating generics
-----
0086_SEI clo    firth   AST encaps setting interrupt_nesting wrong
-----
0087_SEI clo    rlvs   create/use DARK_text_io (IO being
    bamberg    interrupted maybe corrupting the stack)
-----
0088_SEI asg    firth   subset of 0084_SEI that MUST be FIXED!
    bamberg
-----
0089_SEI clo    firth   AST encaps must fully save/restore context
-----

```



## Appendix C: INSTALL.COM

```
$!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!
$!
$! Module: Install.com
$!
$! Purpose:
$! This command procedure is used by a recipient of a DARK release tape to
$! install the software.
$!
$! Parameters:
$!   p1: version being installed.
$!
$! Revision History:
$!
$!   14-feb-89   rlvs   created
$!   12-oct-89   rlvs   stream lined and modified to account for
$!                                     vms version
$!
$!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!
$!!! DEBUG DEBUG DEBUG DEBUG DEBUG DEBUG DEBUG DEBUG DEBUG DEBUG DEBUG !!!!!!
$!!! define mt ps:[DARK_CM.release.testing]
$!!! define mt mub0:
$!!! DEBUG DEBUG DEBUG DEBUG DEBUG DEBUG DEBUG DEBUG DEBUG DEBUG DEBUG !!!!!!
$ set prot=(S:rwe, O:rwd, G:rwd, W:e)/default
$ set noon
$!
$! Obtain the version being installed.
$!
$ version := 'p1
$ loop_back:
$ write sys$output ""
$ if version .eqs. "" then -
    inquire/nopunc version "Which version are you installing [Vx.yy]: "
$ if version .eqs. "" then goto loop_back
$ command_local = f$parse("''version'",,, "NAME") + ".commands"
$!
$! Check to see if the indicated release currently exists.
$!
$ call check_release
$!
$! Create the configuration directory(s) to hold the release.
$!
$ create/dir ['version']
$ create/dir ['command_local]
$ create/dir ['version'.68k]
$ create/dir ['version'.common]
$ create/dir ['version'.vms]
$ create/dir ['version'.vms_adalib]
$!
$! Store the commands and support files in their home (and clean up).
$!
$ rename/log *.com,*.rpt ['command_local']*
$ purge ['command_local']
$!
$! Move to the configuration directory and copy in all the needed sources
$! from the release tape.
$!
$ set default ['version'.68k]
$ set prot=(w:rwd,o:rwd,g:rwd) *.*
```

```

$ backup/log/replace mt:68k_sources.bak/save_set *.*
$ set prot=(w:r,o:rwe,g:rwe) *.*
$!
$ set default [-.common]
$ set prot=(w:rwe,o:rwe,g:rwe) *.*
$ backup/log/replace mt:cmn_sources.bak/save_set *.*
$ set prot=(w:r,o:rwe,g:rwe) *.*
$!
$ set default [-.vms]
$ set prot=(w:rwe,o:rwe,g:rwe) *.*
$ backup/log/replace mt:vms_sources.bak/save_set *.*
$ set prot=(w:r,o:rwe,g:rwe) *.*
$!
$! Cleanup...
$!
$ set default [--]
$ write sys$output ""
$ write sys$output "DARK release ''version' now installed."
$ write sys$output ""
$ dismount/nounl mt:
$ deallocate      mt:
$ exit
$!
$! !!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!
$!
$! Module: Check_release
$!
$! Purpose:
$! This procedure checks to see if the release currently exists.
$! If it does, it ensures that the release is to be over written
$! before allowing the installation process to continue.
$!
$! Parameters:
$!   none.
$!
$! Revision History:
$!
$!   14-feb-89   rlvs   created
$!
$! !!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!
$!
$ check_release: Subroutine
$!
$! If the version does not exist, then proceed with installation of
$! the new release.
$!
$ release_version := ['f$parse(version,,, "name")']
$ release_dir     := 'f$extract(1,10,f$parse(version,,, "type"))'.dir
$ release        := 'release_version''release_dir'
$ if f$search("''release'") .eqs. "" then exit
$!
$! If the release already exists, then there was either a typo above, or
$! the existing version needs to be re-created. In either case, we stop
$! the installation process and let the user make the next move.
$!
$ existing_release:
$ write sys$output ""
$ write sys$output "Version ''version' already exists..."
$ inquire/nopunc kill "Do really wish to over write it [Y/N]: "
$ if kill .eqs. "N" then stop
$!

```

```
$! If an existing release is to be re-created, let's really make sure...
$!
$ write sys$output ""
$ inquire/nopunc kill "Are you positive you want to over write it [Y/N]: "
$ if kill .eqs. "N" then stop
$!
$! Obliterate the existing release...in a noisy manner, so that user knows
$! what is going on
$!
$ set default [.'version']
$ set prot=(w:rwed,o:rwed,g:rwed) *.*
$ delete/log [...] *.*;*
$ delete/log [...] *.*;*
$ set default [sei_dark]
$!
$ exit
$ endsubroutine
```



## Appendix D: BUILD.COM

```

$! !!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!
$!
$! Module: Build.com
$!
$! Purpose:
$! This command procedure is used by a recipient of a DARK release tape to
$! build the VMS and TeleSoft compilation libraries.
$!
$! Parameters:
$!   pl: the version being built
$!
$! Revision History:
$!
$!   14-feb-89   rlvs   created
$!   12-oct-89   rlvs   streamlined and modified to account for
$!                   vms version
$!
$! !!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!
$!!! DEBUG DEBUG DEBUG DEBUG DEBUG DEBUG DEBUG DEBUG DEBUG DEBUG DEBUG DEBUG DEBUG DEBUG DEBUG !!!
$!!! root      := "dark.release"
$!!! DEBUG DEBUG DEBUG DEBUG DEBUG DEBUG DEBUG DEBUG DEBUG DEBUG DEBUG DEBUG DEBUG DEBUG !!!
$!
$! Set up the needed global symbols
$!
$ root      := "sei_dark"
$!
$! Obtain the version being installed
$!
$ set noon
$ version := 'pl
$ loop_back:
$ write sys$output ""
$ if version .eqs. "" then -
$     inquire/nopunc version "Which version are you building [Vx.yy]: "
$ if version .eqs. "" then goto loop_back
$!
$!
$!
$ call Build_VMS
$ call Build_TeleSoft
$!
$ exit
$!

$! !!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!
$!
$!   VMS build procedure
$!
$! !!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!
$!
$! Build_VMS: Subroutine
$!
$! set def sys$disk:['root'..'version']
$!
$! Issue some needed advice...
$!
$! Write sys$output ""
$! Write sys$output "Please ensure that VAX Ada V1.5 and VAX ACS"

```

```

$ Write sys$output "have been installed on this system..."
$ Write sys$output ""
$ inquire/nopunc junk "Is the VAX Ada system installed [Y/N] "
$ if junk .eqs. "N" then exit
$!
$! Create the VMS compilation library
$!
$ write sys$output ""
$ write sys$output "Creating VMS compilation library"
$ write sys$output ""
$ acs create library [.vms_adalib]
$ acs set library [.vms_adalib]
$!
$!
$! Define the needed search paths...
$! d tells VMS to search as follows:
$! [SEI_DARK.Vx.yy.vms], [SEI_DARK.Vx.yy.common]
$! coms tells VMS to search as follows:
$! [SEI_DARK.Vx.yy.vms]
$!
$ define d sys$disk:['root'..'version'.vms], -
           sys$disk:['root'..'version'.common]
$ define coms sys$disk:['root'..'version'.vms]
$!
$! Execute the command file to compile & assemble the sources.
$! If the MMS utility is available, this may also be done by
$! issuing the following command:
$!
$! MMS/action/from_source/descr=[SEI_DARK.Vx.yy.vms]dark.mms DARK
$!
$! Note that the D and COMS search paths above must still be defined
$! for MMS to operate correctly
$!
$ set default [.vms]
$ @coms:dark
$!
$! Cleanup...
$!
$ set def [--]
$ purge
$ exit
$!
$!

$!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!
$!
$! TeleSoft build procedure
$!
$!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!
$!
$ Build_TeleSoft: Subroutine
$!
$ set def sys$disk:['root'..'version'.68k]
$!
$! Issue some needed advice...
$!
$ Write sys$output ""
$ Write sys$output "Please ensure that TeleSoft V3.22 Ada for VAX/VMS to 680X0"
$ Write sys$output "has been installed on this system..."
$ Write sys$output ""
$ inquire/nopunc junk "Is the TeleSoft system installed [Y/N] "

```

```

$ if junk .eqs. "N" then exit
$!
$! Set up the master TeleSoft library; this library can then be referenced
$! by local or project libraries as the default source of DARK object modules
$!
$ write sys$output ""
$ write sys$output "Creating TeleSoft compilation library"
$ write sys$output ""
$ open/write lib_file liblst.alb
$ write lib_file "-- Create local library"
$ write lib_file "   name: adalib"
$ write lib_file "-- 68020 specific libraries"
$ write lib_file "   name: tsada$dir:math68020           -- Math Libraries"
$ write lib_file "   name: tsada$dir:cgs68020           -- Code Generator Support"
$ write lib_file "   name: tsada$dir:tsa68020rtl         -- Software Floating Point"
$ write lib_file " "
$ close lib_file
$ tsada/e68/create adalib
$!
$!
$! Define the needed search paths...
$!   d tells VMS to search as follows:
$!     [SEI_DARK.Vx.yy.68k], [SEI_DARK.Vx.yy.common]
$!   coms tells VMS to search as follows:
$!     [SEI_DARK.Vx.yy.v68k]
$!
$ define d     sys$disk:['root'..'version'.68k], -
               sys$disk:['root'..'version'.common]
$ define coms sys$disk:['root'..'version'.68k]
$!
$! Execute the command file to compile & assemble the sources.
$! If the MMS utility is available, this may also be done by
$! issuing the following command:
$!
$!   MMS/action/from_source/descri=[SEI_DARK.Vx.yy.68k]dark.mms DARK
$!
$! Note that the D and COMS search paths above must still be defined
$! for MMS to operate correctly
$!
$ @coms:dark
$!
$! Cleanup...
$!
$ set def [--]
$ purge
$ exit

```





## Appendix E: SEI Release Procedure

### E.1. New Release

To create a new release of the Kernel, the following steps are needed:

1. Log in to [DARK\_CM] on AESTSC.
2. Create the release by executing the release command script (shown in detail in Section E.3).

```
@ [DARK_CM.RELEASE] RELEASE
```

3. Cut the release tape by executing the make\_tape command script (shown in detail in Section E.5 and following the instructions it provides).

```
@ [DARK_CM.RELEASE] MAKE_TAPE
```

4. Bundle the tape with the documents specified in Chapter 2 and ship as needed.

### E.2. Make a Release Tape

To create a new release of the Kernel, the following steps are needed:

1. Log in to [DARK\_CM] on AESTSC.
2. Cut the release tape by executing the make\_tape command script (shown in detail in Section E.5 and following the instructions it provides).

```
@ [DARK_CM.RELEASE] MAKE_TAPE
```

3. Bundle the tape with the documents specified in Chapter 2 and ship as needed.



```

$!
$ PURGE/LO
$ RENAME *.*;* *.*;1
$ SET PROT=(S:R,O:RWE,G:RE,W:RE) *.*
$!
$!
$! Clean up the common files
$!
$ SET DEFAULT [-.COMMON]
$ PURGE/LO
$ RENAME *.*;* *.*;1
$ SET PROT=(S:R,O:RWE,G:RE,W:RE) *.*
$!
$! Generate the VMS release reports & clean up
$!
$ WRITE SYSS$OUTPUT      ""
$ WRITE SYSS$OUTPUT      "Please edit [DARK_CM.RELEASE]GEN_RPTS.COM to"
$ WRITE SYSS$OUTPUT      "generate VMS reports"
$ WRITE SYSS$OUTPUT      ""
$ INQUIRE/NOPUNC junk "Return when ready..."
$!
$ SET DEFAULT [-.VMS]
$ @[DARK_CM.RELEASE]GEN_RPTS
$!
$ PURGE/LO
$ RENAME *.*;* *.*;1
$ SET PROT=(S:R,O:RWE,G:RE,W:RE) *.*
$!
$ SET DEFAULT [DARK_CM.RELEASE]
$ EXIT

```



```
$!  
$ goto loop  
$!  
$!  
$!      Normal exit point, we jump here when the end of list file is reached  
$!  
$ exit_point:  
$!  
$ Close new_files  
$ Close diffs  
$ Exit
```

## E.5. MAKE\_TAPE.COM

```

$!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!
$!
$! Module: make_tape.com
$!
$! Purpose:
$! This command procedure writes the physical release tape.
$!
$! Notes:
$! This command procedure can only be run from node AESTSC.
$!
$! Revision History:
$!
$!    20-feb-89   rlvs  created
$!    12-oct-89   rlvs  updated to accommodate new VMS version
$!
$!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!
$!!! DEBUG DEBUG DEBUG DEBUG DEBUG DEBUG DEBUG DEBUG DEBUG DEBUG DEBUG !!!!!!
$!!! define mt ps:[.testing]
$!!! DEBUG DEBUG DEBUG DEBUG DEBUG DEBUG DEBUG DEBUG DEBUG DEBUG DEBUG !!!!!!
$!!!
$!!! SEI/V3.00 specific information
$!!!
$ define mt mub0:
$ version = "V3.00"
$!!!
$ on error then goto error_exit
$ set prot=(G:rwed)/default
$ commands = f$parse("''version'",,, "NAME") + ".commands"
$!
$! Prepare the tape drive...
$!
$ allocate          mt:
$ init              mt: DARK
$ mount/noun1/for mt: DARK
$!
$! Save the needed command files, sources, and reports
$!
$ set noon
$ backup/rewind/log/verify/ignore=label/list=tc1 -
  [dark_cm.release.'commands']*.* MT:scripts.bak/save_set
$ backup/norewind/log/verify/ignore=label/list=tc2 -
  [dark_cm.release.'version.68k']*.* MT:68k_sources.bak/save_set
$ backup/norewind/log/verify/ignore=label/list=tc3 -
  [dark_cm.release.'version.common']*.* MT:cmn_sources.bak/save_set
$ backup/norewind/log/verify/ignore=label/list=tc4 -
  [dark_cm.release.'version.vms']*.* MT:vms_sources.bak/save_set
$!
$! Prepare the tape listing
$!
$ delete [dark_cm.doc.vdig]contents_of_'version';*
$ append/new_version tc1.lis,tc2.lis,tc3.lis,tc4.lis -
  [dark_cm.doc.vdig]contents_of_'version'
$ delete tc1.lis;tc2.lis;tc3.lis;tc4.lis;
$!
$! Cleanup...
$!
$ dismount/noun1 mt:
$ deallocate      mt:

```

```
$ exit
$!
$ error_exit:
$!
$ dismount/noun1 mt:
$ deallocate      mt:
$!
$ write sys$output ""
$ write sys$output ""
$ write sys$output "In case of:
$ write sys$output ""
$ write sys$output "    INIT-F-NOPRIV, no privilege for attempted operation"
$ write sys$output ""
$ write sys$output "error, make_tape from account with VOLPRO privs"
$ write sys$output ""
$ write sys$output ""
$!
$ exit
```





## Appendix F: Tape Contents

### Listing of save set(s)

Save set: SCRIPTS.BAK  
Written by: DARK\_CM  
UIC: [011015,000000]  
Date: 16-OCT-1989 12:05:49.94  
Command: BACKUP/REWIND/LOG/VERIFY/IGNORE=LABEL/LIST=TC1 [DARK\_CM.RELEASE.  
Operating system: VAX/VMS version V5.1  
BACKUP version: V5.0  
CPU ID register: 08000000  
Node name: \_AESTSC::  
Written on: \_AESTSC\$MUB0:  
Block size: 8192  
Group size: 10  
Buffer count: 3

[DARK_CM.RELEASE.V3.COMMANDS]BUG.RPT;1	8	11-OCT-1989 14:07
[DARK_CM.RELEASE.V3.COMMANDS]BUILD.COM;1	10	13-OCT-1989 08:07
[DARK_CM.RELEASE.V3.COMMANDS]INSTALL.COM;1	9	13-OCT-1989 14:44

Total of 3 files, 27 blocks  
End of save set

### Listing of save set(s)

Save set: 68K\_SOURCES.BAK  
Written by: DARK\_CM  
UIC: [011015,000000]  
Date: 16-OCT-1989 12:06:03.19  
Command: BACKUP/NOREWIND/LOG/VERIFY/IGNORE=LABEL/LIST=TC2 [DARK\_CM.RELEAS  
Operating system: VAX/VMS version V5.1  
BACKUP version: V5.0  
CPU ID register: 08000000  
Node name: \_AESTSC::  
Written on: \_AESTSC\$MUB0:  
Block size: 8192  
Group size: 10  
Buffer count: 3

[DARK_CM.RELEASE.V3.00.68K]BIO_BODY.ADA;1	121	9-OCT-1989 07:49
[DARK_CM.RELEASE.V3.00.68K]CLOCK.ADA;1	19	12-SEP-1989 10:25
[DARK_CM.RELEASE.V3.00.68K]C_BODY.ADA;1	13	25-AUG-1989 09:59
[DARK_CM.RELEASE.V3.00.68K]DARK.COM;1	13	12-OCT-1989 08:54
[DARK_CM.RELEASE.V3.00.68K]DARK.MMS;1	81	28-SEP-1989 07:33
[DARK_CM.RELEASE.V3.00.68K]DATAGRAM_GLOBALS.ADA;1	54	12-SEP-1989 10:48
[DARK_CM.RELEASE.V3.00.68K]DATAGRAM_MANAGEMENT.ADA;1	32	12-SEP-1989 10:54
[DARK_CM.RELEASE.V3.00.68K]DGM_BODY.ADA;1	41	25-MAY-1989 16:59
[DARK_CM.RELEASE.V3.00.68K]DIFFERENCES.RPT;1	1800	12-OCT-1989 11:02
[DARK_CM.RELEASE.V3.00.68K]GENERIC_KERNEL_TIME.ADA;1	56	27-SEP-1989 08:1'
[DARK_CM.RELEASE.V3.00.68K]GETA68.COM;1	1	13-FEB-1989 10:08
[DARK_CM.RELEASE.V3.00.68K]GKT_BODY_MACHINE_CODE.A68;1	35	25-SEP-1989 13:40
[DARK_CM.RELEASE.V3.00.68K]GTC_BODY.ADA;1	23	27-SEP-1989 09:24
[DARK_CM.RELEASE.V3.00.68K]HARDWARE_INTERFACE.ADA;1	39	25-SEP-1989 13:41
[DARK_CM.RELEASE.V3.00.68K]HI_BODY.ADA;1	1	18-AUG-1988 12:53
[DARK_CM.RELEASE.V3.00.68K]INTERPROCESSOR_INTERRUPTS.ADA;1	11	12-SEP-1989 11:14
[DARK_CM.RELEASE.V3.00.68K]INTERRUPT_PRIORITY_ROUTINES.A68;1		

[DARK_CM.RELEASE.V3.00.68K]IPI_BODY.ADA;1	15	20-FEB-1989	08:36
[DARK_CM.RELEASE.V3.00.68K]IPI_BODY_MACHINE_CODE.A68;1	1	12-OCT-1988	12:14
[DARK_CM.RELEASE.V3.00.68K]IPM_BODY.ADA;1	10	12-SEP-1989	10:14
[DARK_CM.RELEASE.V3.00.68K]KERNEL_INTERRUPT_MANAGEMENT.ADA;1	24	5-SEP-1989	15:17
[DARK_CM.RELEASE.V3.00.68K]KERNEL_TIME.ADA;1	24	12-SEP-1989	11:34
[DARK_CM.RELEASE.V3.00.68K]KIM_BODY.ADA;1	7	27-SEP-1989	09:24
[DARK_CM.RELEASE.V3.00.68K]KIM_BODY_MACHINE_CODE.A68;1	10	27-SEP-1989	09:24
[DARK_CM.RELEASE.V3.00.68K]KT_DEBUG_BODY.ADA;1	18	12-SEP-1989	10:19
[DARK_CM.RELEASE.V3.00.68K]LLCS_BODY_MACHINE_CODE.A68;1	3	27-SEP-1989	09:24
[DARK_CM.RELEASE.V3.00.68K]LLH_BODY.ADA;1	12	9-OCT-1989	12:50
[DARK_CM.RELEASE.V3.00.68K]LLH_BODY_MACHINE_CODE.A68;1	11	26-MAY-1989	16:59
[DARK_CM.RELEASE.V3.00.68K]LLIM_BODY.ADA;1	13	12-SEP-1989	10:18
[DARK_CM.RELEASE.V3.00.68K]LLIM_BODY_MACHINE_CODE.A68;1	5	9-OCT-1989	13:44
[DARK_CM.RELEASE.V3.00.68K]LLPE_BODY.ADA;1	45	12-SEP-1989	10:19
[DARK_CM.RELEASE.V3.00.68K]LLPE_BODY_MACHINE_CODE.A68;1	4	27-SEP-1989	09:01
[DARK_CM.RELEASE.V3.00.68K]LOW_LEVEL_CLOCK.A68;1	21	12-SEP-1989	10:20
[DARK_CM.RELEASE.V3.00.68K]LOW_LEVEL_CONTEXT_SWITCHER.ADA;1	17	12-SEP-1989	10:22
[DARK_CM.RELEASE.V3.00.68K]LOW_LEVEL_HARDWARE.ADA;1	22	12-SEP-1989	11:37
[DARK_CM.RELEASE.V3.00.68K]LOW_LEVEL_INTERRUPT_MANAGEMENT.ADA;1	25	12-SEP-1989	11:41
[DARK_CM.RELEASE.V3.00.68K]LOW_LEVEL_PROCESS_ENCAPSULATION.ADA;1	18	12-SEP-1989	11:45
[DARK_CM.RELEASE.V3.00.68K]LOW_LEVEL_STORAGE_MANAGER.ADA;1	12	12-SEP-1989	11:47
[DARK_CM.RELEASE.V3.00.68K]MEMORY_ADDRESSES.ADA;1	9	12-SEP-1989	11:49
[DARK_CM.RELEASE.V3.00.68K]MEM_BODY.ADA;1	9	12-SEP-1989	11:51
[DARK_CM.RELEASE.V3.00.68K]MVME133A_DEFINITIONS.ADA;1	1	7-SEP-1988	15:12
[DARK_CM.RELEASE.V3.00.68K]MZ8305_DEFINITIONS.ADA;1	23	12-SEP-1989	11:52
[DARK_CM.RELEASE.V3.00.68K]MZ_BODY.ADA;1	28	25-SEP-1989	13:03
[DARK_CM.RELEASE.V3.00.68K]NEW_FILES.RPT;1	1	5-OCT-1988	14:40
[DARK_CM.RELEASE.V3.00.68K]NPROC.ADA;1	1	12-OCT-1989	11:15
[DARK_CM.RELEASE.V3.00.68K]NPROC_BODY.ADA;1	9	25-SEP-1989	13:03
[DARK_CM.RELEASE.V3.00.68K]NPROC_LINK.COM;1	67	19-MAY-1989	08:35
[DARK_CM.RELEASE.V3.00.68K]NPROC_MAIN.ADA;1	4	17-OCT-1988	14:02
[DARK_CM.RELEASE.V3.00.68K]PARALLEL_IO_CONTROLLER.ADA;1	6	27-SEP-1989	09:24
[DARK_CM.RELEASE.V3.00.68K]PE_BODY.ADA;1	37	12-SEP-1989	12:10
[DARK_CM.RELEASE.V3.00.68K]PIO_BODY.ADA;1	12	27-SEP-1989	09:24
[DARK_CM.RELEASE.V3.00.68K]SCC_PORTA_BODY.ADA;1	17	27-SEP-1989	09:24
[DARK_CM.RELEASE.V3.00.68K]TB_BODY.ADA;1	70	27-SEP-1989	09:24
[DARK_CM.RELEASE.V3.00.68K]TC_BODY.ADA;1	4	25-AUG-1989	10:07
[DARK_CM.RELEASE.V3.00.68K]TC_BODY_MACHINE_CODE.A68;1	10	27-SEP-1989	09:24
[DARK_CM.RELEASE.V3.00.68K]TIMER_CONTROLLER.ADA;1	20	12-SEP-1989	10:23
[DARK_CM.RELEASE.V3.00.68K]TIME_BURNER.ADA;1	38	12-SEP-1989	12:13
[DARK_CM.RELEASE.V3.00.68K]TR_BODY.ADA;1	8	27-SEP-1989	08:37
[DARK_CM.RELEASE.V3.00.68K]TS_COMP.COM;1	66	27-SEP-1989	09:24
[DARK_CM.RELEASE.V3.00.68K]TS_LINK.COM;1	2	12-AUG-1988	09:02
[DARK_CM.RELEASE.V3.00.68K]TS_LINK.COM;1	4	28-JUL-1988	16:36

Total of 60 files, 3103 blocks  
End of save set

Listing of save set(s)

Save set: CMN SOURCES.BAK  
 Written by: DARK\_CM  
 UIC: [011015,000000]  
 Date: 16-OCT-1989 12:09:08.80  
 Command: BACKUP/NOREWIND/LOG/VERIFY/IGNORE=LABEL/LIST=TC3 [DARK\_CM.RELEAS  
 Operating system: VAX/VMS version V5.1  
 BACKUP version: V5.0  
 CPU ID register: 08000000  
 Node name: \_AESTSC::  
 Written on: \_AESTSC\$MUB0:  
 Block size: 8192  
 Group size: 10  
 Buffer count: 3

[DARK_CM.RELEASE.V3.00.COMMON]ALARM_MANAGEMENT.ADA;1	8	27-SEP-1989	08:42
[DARK_CM.RELEASE.V3.00.COMMON]BUS_IO.ADA;1	26	12-SEP-1989	12:45
[DARK_CM.RELEASE.V3.00.COMMON]COMMUNICATION_GLOBALS.ADA;1			
	7	27-SEP-1989	08:43
[DARK_CM.RELEASE.V3.00.COMMON]COMMUNICATION_MANAGEMENT.ADA;1			
	11	27-SEP-1989	08:44
[DARK_CM.RELEASE.V3.00.COMMON]CONTEXT_SAVE_AREA.ADA;1			
	24	9-OCT-1989	08:15
[DARK_CM.RELEASE.V3.00.COMMON]CONTEXT_SWITCHER.ADA;1	17	12-SEP-1989	10:36
[DARK_CM.RELEASE.V3.00.COMMON]CONTEXT_SWITCHER_GLOBALS.ADA;1			
	8	12-SEP-1989	12:47
[DARK_CM.RELEASE.V3.00.COMMON]CSA_BODY.ADA;1	1	18-AUG-1988	12:53
[DARK_CM.RELEASE.V3.00.COMMON]CSA_DEBUG.ADA;1	6	27-SEP-1989	09:24
[DARK_CM.RELEASE.V3.00.COMMON]CSA_DEBUG_BODY.ADA;1	10	27-SEP-1989	09:24
[DARK_CM.RELEASE.V3.00.COMMON]CSG_BODY.ADA;1	1	16-AUG-1988	16:59
[DARK_CM.RELEASE.V3.00.COMMON]CS_BODY.ADA;1	5	12-SEP-1989	10:38
[DARK_CM.RELEASE.V3.00.COMMON]DARK_TEXT_IO.ADA;1	11	12-SEP-1989	13:03
[DARK_CM.RELEASE.V3.00.COMMON]DEBUG.ADA;1	9	11-APR-1989	15:24
[DARK_CM.RELEASE.V3.00.COMMON]DGG_BODY.ADA;1	3	27-SEP-1989	09:24
[DARK_CM.RELEASE.V3.00.COMMON]DGG_DEBUG.ADA;1	8	27-SEP-1989	09:24
[DARK_CM.RELEASE.V3.00.COMMON]DGG_DEBUG_BODY.ADA;1	18	27-SEP-1989	09:24
[DARK_CM.RELEASE.V3.00.COMMON]DTIO_BODY.ADA;1	5	9-OCT-1989	07:34
[DARK_CM.RELEASE.V3.00.COMMON]ER_BODY.ADA;1	12	7-DEC-1988	10:09
[DARK_CM.RELEASE.V3.00.COMMON]EXCEPTION_RAISER.ADA	11	12-SEP-1989	13:06
[DARK_CM.RELEASE.V3.00.COMMON]GAM_BODY.ADA;1	14	9-DEC-1988	10:20
[DARK_CM.RELEASE.V3.00.COMMON]GCG_BODY.ADA;1	1	17-AUG-1988	06:58
[DARK_CM.RELEASE.V3.00.COMMON]GCM_BODY.ADA;1	261	25-AUG-1989	08:53
[DARK_CM.RELEASE.V3.00.COMMON]GENERIC_ALARM_MANAGEMENT.ADA;1			
	23	12-SEP-1989	13:13
[DARK_CM.RELEASE.V3.00.COMMON]GENERIC_COMMUNICATION_GLOBALS.ADA;1			
	9	12-SEP-1989	13:08
[DARK_CM.RELEASE.V3.00.COMMON]GENERIC_COMMUNICATION_MANAGEMENT.ADA;1			
	112	25-SEP-1989	07:39
[DARK_CM.RELEASE.V3.00.COMMON]GENERIC_INTERRUPT_GLOBALS.ADA;1			
	19	25-SEP-1989	13:26
[DARK_CM.RELEASE.V3.00.COMMON]GENERIC_INTERRUPT_MANAGEMENT.ADA;1			
	36	25-SEP-1989	07:56
[DARK_CM.RELEASE.V3.00.COMMON]GENERIC_NETWORK_CONFIGURATION.ADA;1			
	25	9-OCT-1989	13:24
[DARK_CM.RELEASE.V3.00.COMMON]GENERIC_NETWORK_GLOBALS.ADA;1			
	16	25-SEP-1989	08:01
[DARK_CM.RELEASE.V3.00.COMMON]GENERIC_PROCESSOR_MANAGEMENT.ADA;1			
	36	25-SEP-1989	08:07
[DARK_CM.RELEASE.V3.00.COMMON]GENERIC_PROCESS_ATTRIBUTE_MODIFIERS.ADA;1			
	35	25-SEP-1989	08:10

[DARK_CM.RELEASE.V3.00.COMMON]GENERIC_PROCESS_ATTRIBUTE_READERS.ADA;1	23	25-SEP-1989	08:13
[DARK_CM.RELEASE.V3.00.COMMON]GENERIC_PROCESS MANAGERS.ADA;1	54	25-SEP-1989	08:15
[DARK_CM.RELEASE.V3.00.COMMON]GENERIC_PROCESS MANAGERS_GLOBALS.ADA;1	12	25-SEP-1989	08:17
[DARK_CM.RELEASE.V3.00.COMMON]GENERIC_PROCESS_TABLE.ADA;1	115	25-SEP-1989	13:05
[DARK_CM.RELEASE.V3.00.COMMON]GENERIC_QUEUE_MANAGER.ADA;1	58	12-SEP-1989	14:33
[DARK_CM.RELEASE.V3.00.COMMON]GENERIC_SCHEDULE_TYPES.ADA;1	17	9-OCT-1989	13:30
[DARK_CM.RELEASE.V3.00.COMMON]GENERIC_SEMAPHORE_MANAGEMENT.ADA;1	32	25-SEP-1989	13:27
[DARK_CM.RELEASE.V3.00.COMMON]GENERIC_STORAGE_MANAGER.ADA;1	15	12-SEP-1989	14:45
[DARK_CM.RELEASE.V3.00.COMMON]GENERIC_TIMESLICE_MANAGEMENT.ADA;1	18	12-SEP-1989	14:49
[DARK_CM.RELEASE.V3.00.COMMON]GENERIC_TIME_GLOBALS.ADA;1	80	9-OCT-1989	13:32
[DARK_CM.RELEASE.V3.00.COMMON]GENERIC_TIME_MANAGEMENT.ADA;1	38	12-SEP-1989	14:56
[DARK_CM.RELEASE.V3.00.COMMON]GENERIC_TOOL_INTERFACE.ADA;1	37	12-SEP-1989	15:00
[DARK_CM.RELEASE.V3.00.COMMON]GIG_BODY.ADA;1	1	26-MAY-1989	14:52
[DARK_CM.RELEASE.V3.00.COMMON]GIM_BODY.ADA;1	20	9-OCT-1989	13:35
[DARK_CM.RELEASE.V3.00.COMMON]GKT_BODY.ADA;1	1	19-OCT-1988	17:01
[DARK_CM.RELEASE.V3.00.COMMON]GMM_BODY.ADA;1	43	9-OCT-1989	13:37
[DARK_CM.RELEASE.V3.00.COMMON]GNC_BODY.ADA;1	3	22-MAR-1989	13:34
[DARK_CM.RELEASE.V3.00.COMMON]GNG_BODY.ADA;1	2	30-AUG-1988	07:53
[DARK_CM.RELEASE.V3.00.COMMON]GPAM_BODY.ADA;1	67	27-SEP-1989	09:24
[DARK_CM.RELEASE.V3.00.COMMON]GPAR_BODY.ADA;1	18	27-SEP-1989	09:24
[DARK_CM.RELEASE.V3.00.COMMON]GPMC_BODY.ADA;1	1	16-AUG-1988	17:25
[DARK_CM.RELEASE.V3.00.COMMON]GPM_BODY.ADA;1	100	9-OCT-1989	13:39
[DARK_CM.RELEASE.V3.00.COMMON]GPTB_BODY.ADA;1	13	27-SEP-1989	09:24
[DARK_CM.RELEASE.V3.00.COMMON]GQM_BODY.ADA;1	29	22-AUG-1989	08:47
[DARK_CM.RELEASE.V3.00.COMMON]GRM_BODY.ADA;1	104	9-OCT-1989	14:08
[DARK_CM.RELEASE.V3.00.COMMON]GSTM_BODY.ADA;1	4	1-SEP-1988	08:04
[DARK_CM.RELEASE.V3.00.COMMON]GST_BODY.ADA;1	2	16-AUG-1988	17:04
[DARK_CM.RELEASE.V3.00.COMMON]GTI_BODY.ADA;1	11	10-AUG-1989	09:00
[DARK_CM.RELEASE.V3.00.COMMON]GTM_BODY.ADA;1	21	17-JUL-1989	08:47
[DARK_CM.RELEASE.V3.00.COMMON]GTSM_BODY.ADA;1	12	25-AUG-1989	09:19
[DARK_CM.RELEASE.V3.00.COMMON]INTERNAL_PROCESS_MANAGEMENT.ADA;1	22	12-SEP-1989	15:02
[DARK_CM.RELEASE.V3.00.COMMON]INTERRUPT_GLOBALS.ADA;1	7	27-SEP-1989	09:24
[DARK_CM.RELEASE.V3.00.COMMON]INTERRUPT_MANAGEMENT.ADA;1	9	9-OCT-1989	13:41
[DARK_CM.RELEASE.V3.00.COMMON]INTERRUPT_NAMES.ADA;1	14	12-SEP-1989	15:03
[DARK_CM.RELEASE.V3.00.COMMON]KEN_BODY.ADA;1	1	17-FEB-1989	16:14
[DARK_CM.RELEASE.V3.00.COMMON]KERNEL_ENCAPSULATION.ADA;1	11	12-SEP-1989	15:05
[DARK_CM.RELEASE.V3.00.COMMON]KERNEL_EXCEPTIONS.ADA;1	54	25-SEP-1989	13:35
[DARK_CM.RELEASE.V3.00.COMMON]KE_BODY.ADA;1	1	16-AUG-1988	16:55
[DARK_CM.RELEASE.V3.00.COMMON]KT_DEBUG.ADA;1	6	27-SEP-1989	08:58
[DARK_CM.RELEASE.V3.00.COMMON]LLSM_BODY.ADA;1	3	27-SEP-1989	09:24
[DARK_CM.RELEASE.V3.00.COMMON]MAKE_NCT.ADA;1	21	16-DEC-1988	08:06
[DARK_CM.RELEASE.V3.00.COMMON]MM_DEBUG.ADA;1	10	9-OCT-1989	13:49
[DARK_CM.RELEASE.V3.00.COMMON]NCT_DEBUG.ADA;1	7	27-SEP-1989	09:03
[DARK_CM.RELEASE.V3.00.COMMON]NCT_DEBUG_BODY.ADA;1	6	27-SEP-1989	09:24

[DARK_CM.RELEASE.V3.00.COMMON]NC_BODY.ADA;1	3	22-MAR-1989 13:33
[DARK_CM.RELEASE.V3.00.COMMON]NETWORK_CONFIGURATION.ADA;1		
	26	12-SEP-1989 15:13
[DARK_CM.RELEASE.V3.00.COMMON]NETWORK_GLOBALS.ADA;1	8	12-SEP-1989 15:14
[DARK_CM.RELEASE.V3.00.COMMON]PIT_BODY.ADA;1	12	25-AUG-1989 09:24
[DARK_CM.RELEASE.V3.00.COMMON]PROCESSOR_MANAGEMENT.ADA;1		
	9	27-SEP-1989 09:24
[DARK_CM.RELEASE.V3.00.COMMON]PROCESS_ATTRIBUTE_MODIFIERS.ADA;1		
	8	27-SEP-1989 09:24
[DARK_CM.RELEASE.V3.00.COMMON]PROCESS_ATTRIBUTE_READERS.ADA;1		
	8	27-SEP-1989 09:14
[DARK_CM.RELEASE.V3.00.COMMON]PROCESS_ENCAPSULATION.ADA;1		
	10	12-SEP-1989 15:16
[DARK_CM.RELEASE.V3.00.COMMON]PROCESS_INDEX_TABLE.ADA;1		
	18	12-SEP-1989 15:19
[DARK_CM.RELEASE.V3.00.COMMON]PROCESS MANAGERS.ADA;1	10	27-SEP-1989 09:24
[DARK_CM.RELEASE.V3.00.COMMON]PROCESS MANAGERS_GLOBALS.ADA;1		
	8	9-OCT-1989 13:52
[DARK_CM.RELEASE.V3.00.COMMON]PROCESS_TABLE.ADA;1	10	27-SEP-1989 09:24
[DARK_CM.RELEASE.V3.00.COMMON]PTB_DEBUG.ADA;1	8	27-SEP-1989 09:24
[DARK_CM.RELEASE.V3.00.COMMON]PTB_DEBUG_BODY.ADA;1	42	27-SEP-1989 09:24
[DARK_CM.RELEASE.V3.00.COMMON]SCC_PORTA.ADA;1	32	12-SEP-1989 15:23
[DARK_CM.RELEASE.V3.00.COMMON]SCHEDULER.ADA;1	26	12-SEP-1989 15:32
[DARK_CM.RELEASE.V3.00.COMMON]SCHEDULE_TYPES.ADA;1	9	27-SEP-1989 09:24
[DARK_CM.RELEASE.V3.00.COMMON]SCH_BODY.ADA;1	54	25-AUG-1989 09:25
[DARK_CM.RELEASE.V3.00.COMMON]SEMAPHORE_MANAGEMENT.ADA;1		
	8	27-SEP-1989 09:24
[DARK_CM.RELEASE.V3.00.COMMON]TIMESLICE_MANAGEMENT.ADA;1		
	8	27-SEP-1989 09:24
[DARK_CM.RELEASE.V3.00.COMMON]TIMESLICE_PARAMETERS.ADA;1		
	10	12-SEP-1989 15:25
[DARK_CM.RELEASE.V3.00.COMMON]TIME_GLOBALS.ADA;1	9	27-SEP-1989 09:24
[DARK_CM.RELEASE.V3.00.COMMON]TIME_KEEPER.ADA;1	27	9-OCT-1989 14:10
[DARK_CM.RELEASE.V3.00.COMMON]TIME_KEEPER_GLOBALS.ADA;1		
	11	12-SEP-1989 15:28
[DARK_CM.RELEASE.V3.00.COMMON]TIME_MANAGEMENT.ADA;1	8	27-SEP-1989 09:24
[DARK_CM.RELEASE.V3.00.COMMON]TIO_BODY.ADA;1	1	16-AUG-1988 16:57
[DARK_CM.RELEASE.V3.00.COMMON]TKG_BODY.ADA;1	1	16-AUG-1988 17:28
[DARK_CM.RELEASE.V3.00.COMMON]TL_BODY.ADA;1	25	9-OCT-1989 13:53
[DARK_CM.RELEASE.V3.00.COMMON]TOOL_INTERFACE.ADA;1	8	27-SEP-1989 09:24
[DARK_CM.RELEASE.V3.00.COMMON]TOOL_INTERFACE_GLOBALS.ADA;1		
	8	25-SEP-1989 13:24
[DARK_CM.RELEASE.V3.00.COMMON]TOOL_INTERFACE_OUTPUT.ADA;1		
	8	12-SEP-1989 15:31
[DARK_CM.RELEASE.V3.00.COMMON]TOOL_LOGGER.ADA;1	19	25-SEP-1989 13:23
[DARK_CM.RELEASE.V3.00.COMMON]TSP_BODY.ADA;1	1	17-AUG-1988 10:25

Total of 109 files, 2364 blocks  
End of save set

Listing of save set(s)

```

Save set:          VMS_SOURCES.BAK
Written by:       DARK_CM
UIC:              [011015,000000]
Date:             16-OCT-1989 12:11:42.71
Command:          BACKUP/MOREWIND/LOG/VERIFY/IGNORE=LABEL/LIST=TC4 [DARK_CM.RELEAS
Operating system: VAX/VMS version V5.1
BACKUP version:   V5.0
CPU ID register:  08000000
Node name:        _AESTSC::

```

Written on: AESTSC\$MUB0:  
 Block size: 8192  
 Group size: 10  
 Buffer count: 3

```
[DARK_CM.RELEASE.V3.00.VMS]AM_BODY_MACHINE_CODE.MAR;1
30 28-SEP-1989 15:43
[DARK_CM.RELEASE.V3.00.VMS]AST_MANAGER.ADA;1
16 9-OCT-1989 08:06
[DARK_CM.RELEASE.V3.00.VMS]BIO_BODY.ADA;1
111 9-OCT-1989 08:07
[DARK_CM.RELEASE.V3.00.VMS]CLOCK.ADA;1
19 9-OCT-1989 08:11
[DARK_CM.RELEASE.V3.00.VMS]C_BODY.ADA;1
7 25-AUG-1989 09:27
[DARK_CM.RELEASE.V3.00.VMS]DARK.COM;1
16 12-OCT-1989 08:56
[DARK_CM.RELEASE.V3.00.VMS]DARK.MMS;1
74 12-OCT-1989 08:56
[DARK_CM.RELEASE.V3.00.VMS]DATAGRAM_GLOBALS.ADA;1
54 9-OCT-1989 08:43
[DARK_CM.RELEASE.V3.00.VMS]DATAGRAM_MANAGEMENT.ADA;1
30 9-OCT-1989 08:52
[DARK_CM.RELEASE.V3.00.VMS]DGM_BODY.ADA;1
34 9-OCT-1989 08:55
[DARK_CM.RELEASE.V3.00.VMS]DIFFERENCES.RPT;1
2149 12-OCT-1989 11:47
[DARK_CM.RELEASE.V3.00.VMS]GENERIC_KERNEL_TIME.ADA;1
61 9-OCT-1989 09:29
[DARK_CM.RELEASE.V3.00.VMS]GETMAR.COM;1
1 28-AUG-1989 07:52
[DARK_CM.RELEASE.V3.00.VMS]GKT_BODY_MACHINE_CODE.MAR;1
30 9-OCT-1989 12:48
[DARK_CM.RELEASE.V3.00.VMS]GTC_BODY.ADA;1
25 9-OCT-1989 09:35
[DARK_CM.RELEASE.V3.00.VMS]HARDWARE_INTERFACE.ADA;1
40 9-OCT-1989 11:42
[DARK_CM.RELEASE.V3.00.VMS]HI_BODY.ADA;1
1 18-AUG-1988 12:53
[DARK_CM.RELEASE.V3.00.VMS]IPM_BODY.ADA;1
24 29-AUG-1989 11:52
[DARK_CM.RELEASE.V3.00.VMS]KERNEL_TIME.ADA;1
61 9-OCT-1989 11:56
[DARK_CM.RELEASE.V3.00.VMS]KT_DEBUG_BODY.ADA;1
4 9-OCT-1989 11:57
[DARK_CM.RELEASE.V3.00.VMS]LLCS_BODY_MACHINE_CODE.MAR;1
12 9-OCT-1989 12:50
[DARK_CM.RELEASE.V3.00.VMS]LLH_BODY.ADA;1
10 9-OCT-1989 11:58
[DARK_CM.RELEASE.V3.00.VMS]LLIM_BODY.ADA;1
4 9-OCT-1989 11:59
[DARK_CM.RELEASE.V3.00.VMS]LLPE_BODY_MACHINE_CODE.MAR;1
17 9-OCT-1989 12:51
[DARK_CM.RELEASE.V3.00.VMS]LOW_LEVEL_CONTEXT_SWITCHER.ADA;1
22 9-OCT-1989 12:13
[DARK_CM.RELEASE.V3.00.VMS]LOW_LEVEL_HARDWARE.ADA;1
24 9-OCT-1989 12:18
[DARK_CM.RELEASE.V3.00.VMS]LOW_LEVEL_INTERRUPT_MANAGEMENT.ADA;1
18 9-OCT-1989 12:22
[DARK_CM.RELEASE.V3.00.VMS]LOW_LEVEL_PROCESS_ENCAPSULATION.ADA;1
13 9-OCT-1989 12:04
[DARK_CM.RELEASE.V3.00.VMS]LOW_LEVEL_STORAGE_MANAGER.ADA;1
9 9-OCT-1989 12:25
[DARK_CM.RELEASE.V3.00.VMS]NEW_FILES.RPT;1
1 12-OCT-1989 11:59
[DARK_CM.RELEASE.V3.00.VMS]PE_BODY.ADA;1
13 9-OCT-1989 12:29
[DARK_CM.RELEASE.V3.00.VMS]SCC_PORTA_BODY.ADA;1
8 9-OCT-1989 12:32
[DARK_CM.RELEASE.V3.00.VMS]TB_BODY.ADA;1
4 9-OCT-1989 12:34
[DARK_CM.RELEASE.V3.00.VMS]TIME_BURNER.ADA;1
8 9-OCT-1989 12:36
[DARK_CM.RELEASE.V3.00.VMS]TK_BODY.ADA;1
63 9-OCT-1989 14:05
[DARK_CM.RELEASE.V3.00.VMS]VMS_BODY.ADA;1
19 9-OCT-1989 12:40
[DARK_CM.RELEASE.V3.00.VMS]VMS_SERVICES.ADA;1
8 9-OCT-1989 12:42
```

Total of 37 files, 3040 blocks  
 End of save set

REPORT DOCUMENTATION PAGE

1a. REPORT SECURITY CLASSIFICATION <b>UNCLASSIFIED</b>			1b. RESTRICTIVE MARKINGS <b>NONE</b>				
2a. SECURITY CLASSIFICATION AUTHORITY <b>N/A</b>			3. DISTRIBUTION/AVAILABILITY OF REPORT <b>APPROVED FOR PUBLIC RELEASE DISTRIBUTION UNLIMITED</b>				
2b. DECLASSIFICATION/DOWNGRADING SCHEDULE <b>N/A</b>							
4. PERFORMING ORGANIZATION REPORT NUMBER(S) <b>CMU/SEI-89-TR-20</b>			5. MONITORING ORGANIZATION REPORT NUMBER(S) <b>ESD-89-TR-28</b>				
6a. NAME OF PERFORMING ORGANIZATION <b>SOFTWARE ENGINEERING INST.</b>		6b. OFFICE SYMBOL (If applicable) <b>SEI</b>	7a. NAME OF MONITORING ORGANIZATION <b>SEI JOINT PROGRAM OFFICE</b>				
6c. ADDRESS (City, State and ZIP Code) <b>CARNEGIE-MELLON UNIVERSITY PITTSBURGH, PA 15213</b>			7b. ADDRESS (City, State and ZIP Code) <b>ESD/XRS1 HANSCOM AIR FORCE BASE HANSCOM, MA 01731</b>				
8a. NAME OF FUNDING/SPONSORING ORGANIZATION <b>SEI JOINT PROGRAM OFFICE</b>		8b. OFFICE SYMBOL (If applicable) <b>ESD/XRS1</b>	9. PROCUREMENT INSTRUMENT IDENTIFICATION NUMBER <b>F1962885C0003</b>				
8c. ADDRESS (City, State and ZIP Code) <b>CARNEGIE-MELLON UNIVERSITY PITTSBURGH, PA 15213</b>			10. SOURCE OF FUNDING NOS.	PROGRAM ELEMENT NO.	PROJECT NO.	TASK NO.	WORK UNIT NO.
11. TITLE (Include Security Classification) <b>VERSION DESCRIPTION AND INSTALLATION GUIDE</b>			<b>63752F</b>	<b>N/A</b>	<b>N/A</b>	<b>N/A</b>	<b>N/A</b>
12. PERSONAL AUTHOR(S) <b>Judy Bamberger, Timothy Coddington, Robert Firth, Daniel Klein, Dave Stinchcomb, Van Scoy, Roger</b>			14. DATE OF REPORT (Yr., Mo., Day) <b>December 1989</b>				
13a. TYPE OF REPORT <b>FINAL</b>		13b. TIME COVERED FROM _____ TO _____		15. PAGE COUNT <b>47</b>			
16. SUPPLEMENTARY NOTATION							
17. COSATI CODES			18. SUBJECT TERMS (Continue on reverse if necessary and identify by block number) <b>Ada kernel DARK operating systems distributed real-time</b>				
FIELD	GROUP	SUB. GR.					
19. ABSTRACT (Continue on reverse if necessary and identify by block number) This document characterizes a specific version of the Distributed Ada Real-Time Kernel (DARK) software artifact and supplies documentation for its installation and use. This document is geared toward: the engineer responsible for installing the Kernel, engineers responsible for proting and maintaining the Kernel, and engineers using the Kernel and needing an awareness of changes from the previous release.							
20. DISTRIBUTION/AVAILABILITY OF ABSTRACT <b>UNCLASSIFIED/UNLIMITED <input checked="" type="checkbox"/> SAME AS RPT. <input type="checkbox"/> DTIC USERS <input checked="" type="checkbox"/></b>				21. ABSTRACT SECURITY CLASSIFICATION <b>UNCLASSIFIED, UNLIMITED DISTRIBUTION</b>			
22a. NAME OF RESPONSIBLE INDIVIDUAL <b>KARL H. SHINGLER</b>			22b. TELEPHONE NUMBER (Include Area Code) <b>412 268-7630</b>		22c. OFFICE SYMBOL <b>SEI JPO</b>		